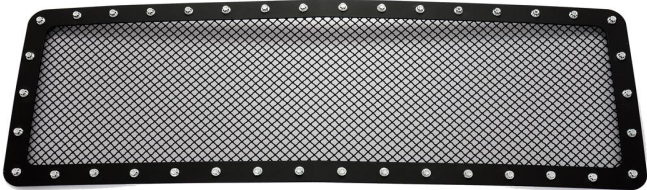
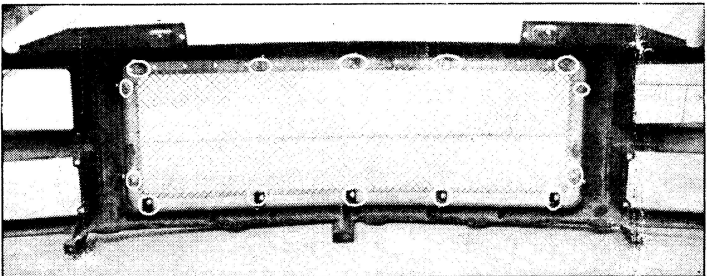


Part#	GR07LEJ10H	Application	1988-1993 GMC C/K Truck Main Upper
-------	------------	-------------	------------------------------------

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Mesh Grille	1	Stainless steel	3	90° L Bracket	14	/
	2	Bolt	14	10-24× 1/2"	4	Lock Nut	28	10-24

Install Notes: Overlay  Replacement  Drill  Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Pop hood, remove plastic shroud at the top and set fasteners aside.	N/A
3	<b>Optional:</b> Using factory instructions, remove the entire front grille shell.	N/A
4	Attach the 90° L bracket to the screws on the bottom of the grille, secure them with lock nuts.	N/A
5	Position the grille onto grille shell cavity.	N/A
6	Mark locations for drilling on the shell through the holes of L brackets. Then drill holes on those locations.	N/A
7	Attach the grille to the shell by inserting the screws through the tabs of L brackets and holes on the shell; secure them with lock nuts provided.	
8	Reinstall the plastic shroud with the fasteners removed in step 2.	N/A
9	Installation completed!!!	N/A

The instruction here is for your reference only. You may need to bend the grille a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!