



PATENT PRODUCT

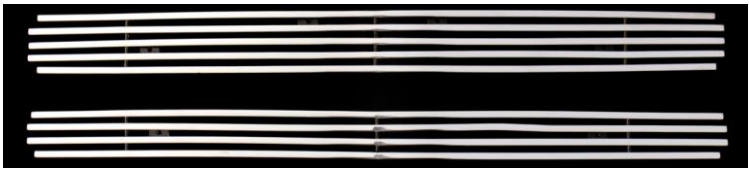



Grille Installation Instruction

Rev. 190101

Part#	GR03FEG05 C/S/J	<i>Application</i>	For 1998-2005 Chevy Blazer Criss Cross 1998-2004 Chevy S-10 Criss Cross
--------------	--------------------	--------------------	--

	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
Parts List	1	Billet Grille	2	Stainless steel	3	Truss Head Tapping Screws	6	8×2"
	2	U-Clip Nuts	6	8#	4	Tabs	6	

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Remove the grille from the truck by opening the hood and gently pulling on all four corners and in the center to release the retaining clips. Unplug and remove parking lights.	
3	Center the billet grille into the opening of the factory grille shell. Secure the bolt to the threaded holes on the front of the grille. Be sure the bolts are through the OEM grille shell. (five bar grille in the top, four bar grille in the bottom).(Fig 1)	
4	Secure billet grille using the 'J' hook Tab from the back side of the OEM grille shell.(Fig 2&3)	
	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>Fig 1</p> </div> <div style="text-align: center;">  <p>Fig 2</p> </div> <div style="text-align: center;">  <p>Fig 3</p> </div> </div>	
5	Make sure the billet grille is centered and tighten the fasteners, but do not over-tighten.	
6	Reinstall the black plastic cover which was removed in step 2.	
7	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the grille a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!