
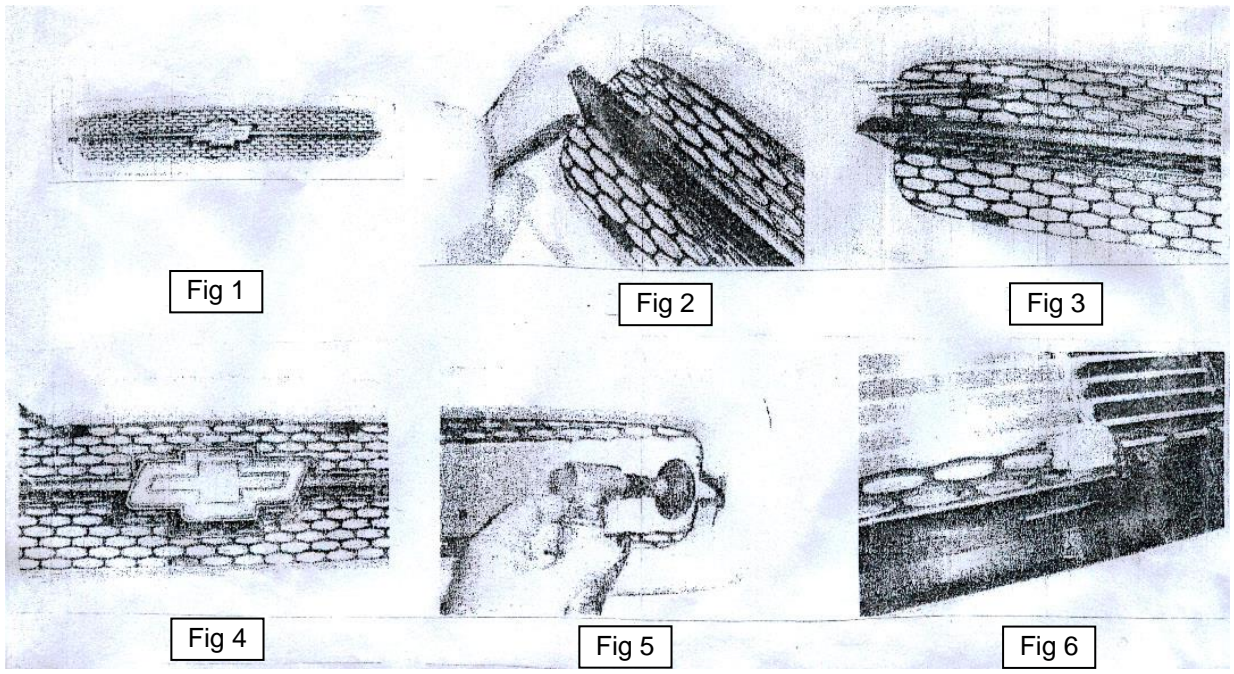


Part#	GR03HFJ02A/H	Application	For 1994-1996 Chevy Impala SS		
-------	--------------	-------------	--------------------------------------	--	--

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	1	Aluminum	3	Truss Head Screws	4	8×5/8"
	2	Slotted Tabs	4		4	U- Clip Nuts	4	8#

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Remove grille shell from the car. Then mask to protect paint finish.(Fig 1)	
3	CAREFULLY cut out center bar section from outer grille shell edges. (Fig 2)	
4	Cut center section of honey comb away leaving the last 2 rows of comb on top and bottom of shell. (Fig 3)	
5	DO NOT cut the 2 hole locations. As this will prevent re-installation of grille shell. (Fig 4)	
6	Carefully sand all rough edges smooth after cutting. NOTE: Large cut out remaining may be filled and repainted for better appearance. (Fig 5)	
7	Install billet grille from the front of the shell. then center, and attach using tabs . (Fig 6)	



8	Make sure the grille is centered and tighten the fasteners.
9	Reinstall the black plastic cover which was removed in step 2.
10	Installation completed!!!

The instruction here is for your reference only. You may need to bend the grille a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!