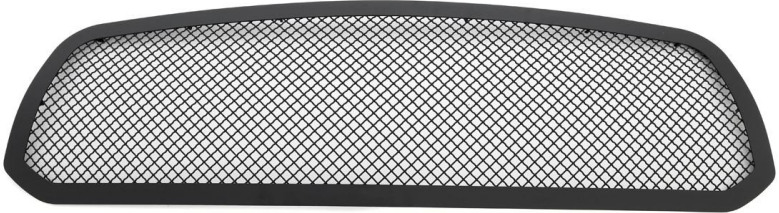
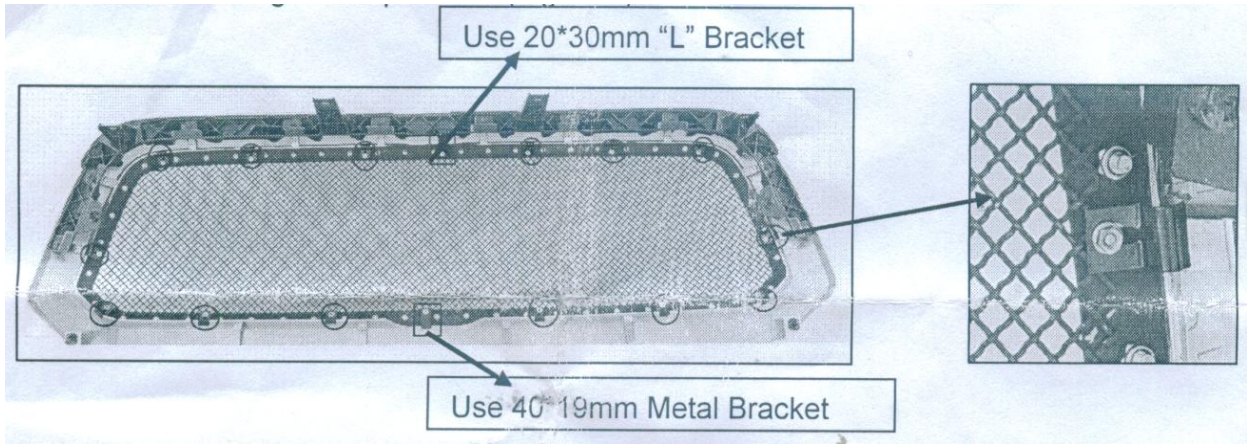


Part#	GR04CEI86K	Application						
Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Mesh Grille	1		4	L Brackets	1	20*30mm
	2	S Brackets	14		5	Flange Nut	16	M4
	3	Metal Brackets	1	40*19mm				
Install Notes: Overlay <input type="checkbox"/> Replacement <input checked="" type="checkbox"/> Drill <input checked="" type="checkbox"/> Cut <input checked="" type="checkbox"/>								
Step	Description	illustration						
1	Identify the grille & hardware with parts list.							
2	Pop hood, remove plastic shroud at the top and set fasteners aside.	N/A						
3	Optional: Using factory instructions, remove the entire front grille shell, cut cross bar of OEM grille use the die grinder and sanding the cut place.	N/A						
4	Attach S Brackets to the screws on the grille, secure them with flange nuts. Drill the mounting hole if it's necessary.	N/A						
5	Position the Grille onto grille shell cavity.							
6	Attach the Grille to the shell by inserting the screws through the holes of S Brackets and the holes on the shell, and then secure them with Flange Nuts provided.							
7	Reinstall the plastic shroud with the fasteners removed in Step 2. Installation completed!!!							

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result.

Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation.

We are not responsible for any damage caused by the installation. Thank you for choosing our product!