

Part#	GR06FEC57J	Application	For 05~07 Ford F-250~F-550 Tow Hook Grille – 2pcs
-------	------------	-------------	---

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	2	Stainless steel	6	Screws	4	8# × 1"
	2	Flat Tabs	2		7	Extension Brackets	2	
	3	U-Clip Nuts	4	8#	8	Hex Bolts	2	1/4" -20x3/4"
	4	Washers	2	1/4"	9	Lock Washers	2	1/4"
	5	Nuts	2	1/4" -20				

Install Notes: Overlay



Replacement




Drill



Cut

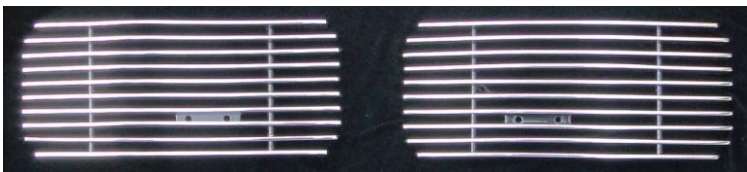

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell.	N/A
3	Remove the tow hooks from the vehicle. Slide the two smaller holes on the extension brackets. Bolt the extension brackets to the hole in the frame and brackets. Bolt the extension bracket to the hole in the frame using the 1/4" fasteners; Use the tab between the frame and bracket. Do not tighten the hardware at this time.	N/A
4	Make sure the billet grille is centered and tighten the fasteners. but do not over-tighten.	N/A
5	Reinstall the black plastic cover which was removed in step 2.	N/A
6	Installation completed!!!	N/A

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!