



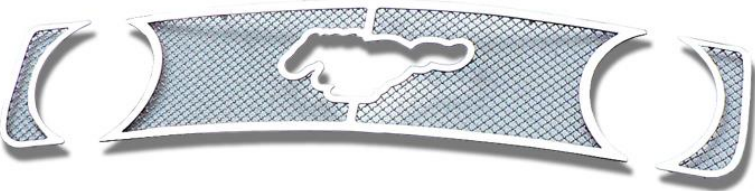
Grille Installation Instruction

Rev. 141001

Part#	F76023T-H	Application	For 2005-2009 Ford Mustang GT V8 With Logo Show
-------	-----------	-------------	---

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Mesh Grille	3	Stainless steel	4	Stud	11	6-32×2"
	2	Flat Tabs	11		5	Nylon Lock Nuts	11	6-32
	3	Washers	11					

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	You may need to remove the black plastic cover (at the bottom of OEM front bumper) from vehicle. This will allow access to the rear of the grille shell.	
3	Center the grille into the opening of the factory grille shell. Be sure the studs are through the OEM grille shell.	
4	Thread a stud in each nut welded to the grille. From the rear, place a tab on each stud.	
5	Make sure the grille is centered and tighten the fasteners.	
6	Reinstall the black plastic cover which was removed in step 2.	
7	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!