
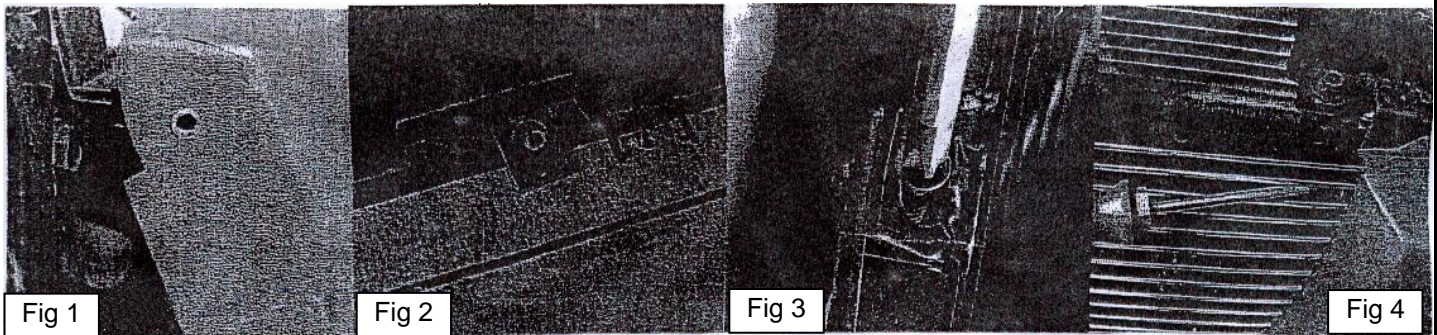


Part#	GR06HEA07A/H	Application	<b>For 2005-2007 Ford Escape</b>
-------	--------------	-------------	----------------------------------

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	1	Aluminum	3	Truss Head Screws	4	8# × 1"
	2	U-Clip Nuts	4	8#				

Install Notes: Overlay  Replacement  Drill  Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Remove the factory grille shell from the vehicle.	
3	Place the billet grille into the opening to replace the factory shell.	
4	Center the billet grille into the opening, being sure that the grille sits flush to the outside of the opening, and matches the hood line.	
5	Mark and drill the four mounting locations located on the billet grille. (2 lower)(2 on the upper sides) See figure 1&2.	
6	Place two U-clip nuts over the plastic where the lower grille mounts. See figure 2.	
7	Place the grille back into the opening and secure the lower portion of the billet, using the #8 screws. See figure 3.	
8	Secure the upper portion of the grille to the sides, by placing the U-clip nuts behind the drilled hole and using the U-clip nut as a nut, and then secure using the #8 screws. See figure 4.	
9	Make sure the billet grille is centered and tighten the fasteners, but do not over-tighten.	
10	Installation completed!!!	



The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!