

Auto Auto Steelust Mc									
Part#	GR07HFC62A/H		Applic	Application For 2016-2018 GMC Sierra 1500					
	ltem	Part Name	QTY	Desc	ription	ltem	Part Name	QTY	Description
Parts Lis	t 1	Billet Grille	1	Alumir	um	3	Flat Nut	8	
	2	Screw	8	8#X1"					
Install Notes: Overlay \times Replacement \checkmark Drill \checkmark Cut \checkmark									
Step		Descripti	on				illustration		
	Identify the grille & hardware with parts list.								
2	Turn off	engine and chal	k tires w	ith stop	block. O	pen Hoo	d. Disconnect Battery.		
Begin by removing the plastic core support cover shroud. There will a number of plastic "Push Tabs" that secure the cover. Remove them all and aside for reinstallation. Remove cover and set aside for later.									



Part#	GR07HFC62A/H	Application	For 2016-2018 GMC Sierra 1500
4	Remove the factory har	dware that secu	res the grille assembly to the core support.
FIG 6	FIG 7		FIG 8
5	towards the very front of the front half fender trin	of the fender trim	heel well fender trim. Start at the top middle, and working your way in where it meets the front bumper, use a torq bit remove screws. With ed out of the way, (as seen in Figure 7) you can access the additional pumper valance. Remove these bolts and set aside all hardware for re-
X			
FIG 11		FIG 11	FIG 12
6	located directly above color). Slip out the vala	the front bumper nce away from v	chicles plastic lower bumper valance (a long and slim trim panel that is er, below the grille,and is usually color matched to the vehicle body where it meets the front fender. You will need to unfasten several tabs and behind bumper and underneath headlights.




Part#	GR07HFC62A/H	Application	For 2016-2018 GMC Sierra 1500				
7	With the lower plastic bumper valance removed you can now access several bolts at the bottom below the grille lip and above the vehicle bumper and also located (2) more at the lower corners. Remove all hardware that fixes grilles assembly to vehicle.						
FIG 16		FIG 17	FIG 19				
8			n corners of each side and firmly pull on both sides. T from the grille mounts. The grille should now be free				
9	Flip the grille assembly	over and place o	on a flat cushioned surface or foam pad to begin disas	sembly.			
10	It is now time to remove the radiator induction shroud. Remove all the plastic push tabs that secures the shroud and set aside for later.						
	<image/>						




Part#	GR07HFC62A/H	Application	For 2016-2018 GMC Sierra 1500
11	pattern design and sepa	arate the factory le, make a prope	safely out of the way. It is now time cut into the factory grille plastic grille shell to re-purpose and utilize with your new grille. er cutting path using a paint pen or bright marker to highlight the correct e plastic grille pattern.
		FIG 28	<image/>
12			o examine the grille face and back side so that you understand where he new Grille will insert and mount to the factory grille shell.
13		cut line is well	as proper cut locations around edge and corners, make one final clear of the factory chrome shell. You DO NOT want to cut into or
14	along your marked line. Carefully navigate cuttir Carefully continue your	ng your corner e cut path along c	egree cutoff wheel, zip saw, sawzall or something similar, carefully cut dges. outer edge without damaging factory. make certain your cut reflects the images presented here.
15	Separate the shell from	the inner grille p	Diece.



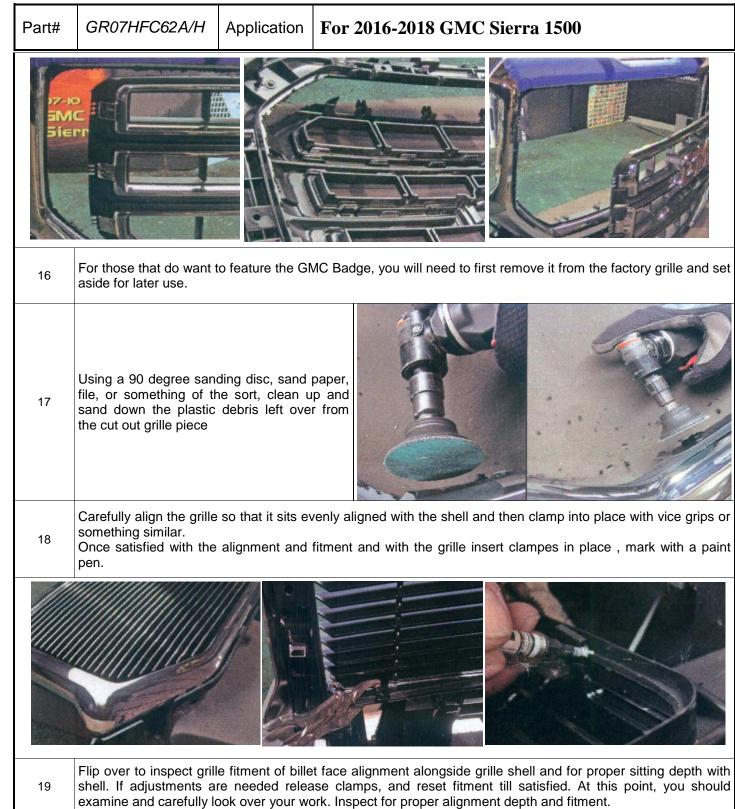




Rev. 190301

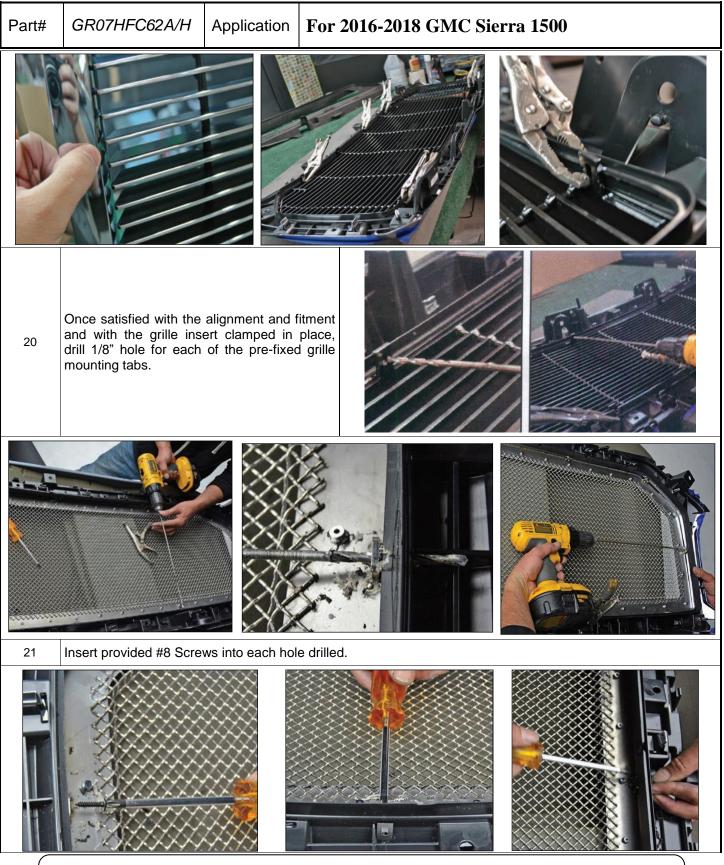



Rev. 190301

Part#	GR07HFC62A/H	Application	For 2016-2018 GMC Sierra 1500				
22	Slide on flat nut and tighten down.						
23	Once satisfied with the installation, proceed wassembly.						
24	Take the radiator induction shroud that was set aside earlier and align it over your new grille assembly. Line up the tabs and set it down in place.						
24	Use the plastic push tal and fasten down.	os to secure					
26	Take the complete grille assembly, put into place and position to nose of vehicle.						
27	Starting at the top, slip the grille assembly (shell) mounting tabs up and onto their mounts. Note the "Male Post " and "Female Insert " will help locate the correct position of grille assembly.						
28 Position lower mounts and finally re-install all factory bardware							
28	Position lower mounts and finally re-install all factory hardware.						

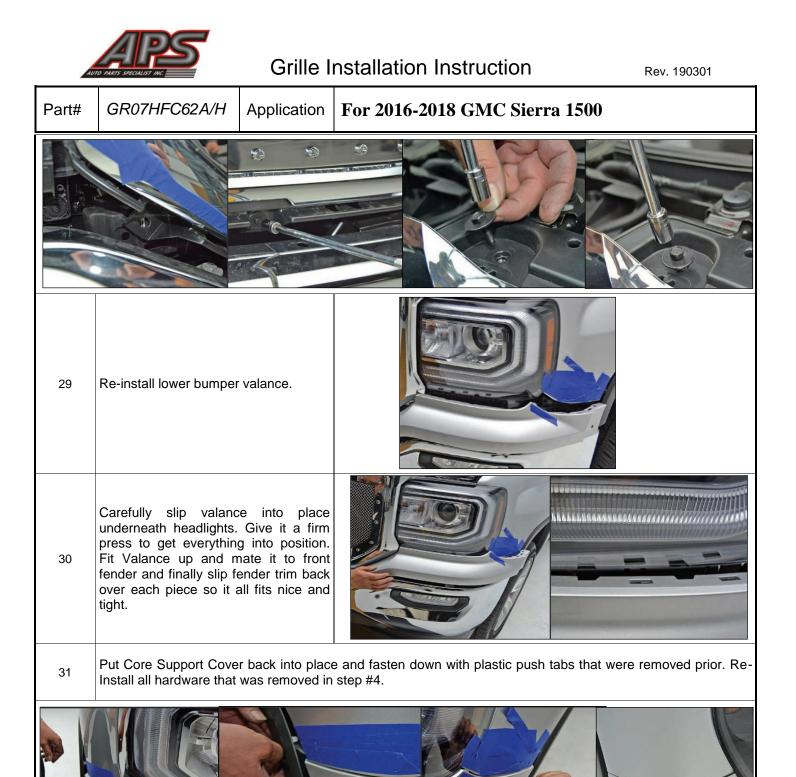

Au	TO PARTS SPECALIST INC.	Grille I	nstallation Instruction	Rev. 190301				
Part#	GR07HFC62A/H	Application	For 2016-2018 GMC Sierra 1500					
H WE A. No V	<image/>							
32	Check over your work for hardware tightness and visual inspection.							
33	At this point you want to look over your work and examine the gap alignments around all edges and in between the new Grille and the vehicle components and body lines. Carefully close the hood for a complete visual inspection. If adjustment is needed, you can remove grille and loosen the hardware mounts and shift side to side or up & down to achieve proper look.							
34	Installation completed!!!							