




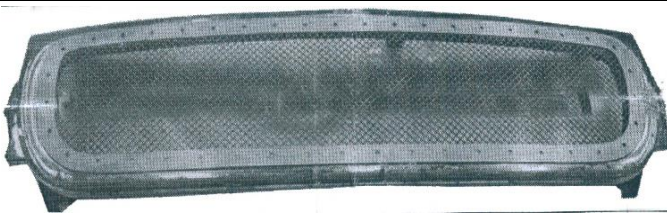
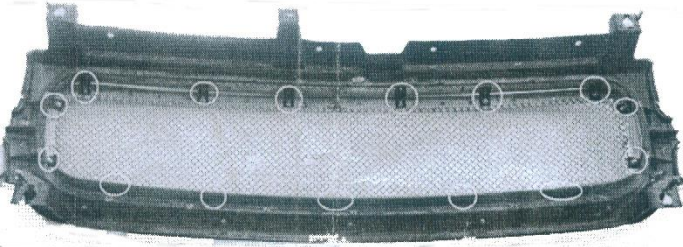
Grille Installation Instruction

Rev. 190301

Part#	GR07LEG04H	Application	For 1999-2000 GMC Sierra 1500 Not For HD/2000-2006 GMC Yukon /2001-2006 GMC Yukon Denali /2001-2002 GMC Sierra All Model/2001-2001 GMC Sierra C3 /2002-2006 GMC Sierra Denali
-------	------------	-------------	---

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Mesh Grille	1	Stainless steel	4	L Bracket A	6	/
	2	Bolt	15	10-24x1/2"	5	L Bracket B	9	/
	3	Flange Nut	30	10-24				

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell.	
3	Optional: Using factory instruction, remove the entire front grille shell .	
4	Secure the L Brackets to the bolts which were weld on the rear of the grille with flange nuts.	
5	Attach the L Brackets A to the bolts on the top of the grille, secure them with flange nuts.	
6	Attach the L Brackets B to the other bolts on the grille, secure them with flange nuts.	
7	Position the grille onto grille shell cavity.	
8	Mark locations for drilling on the shell through the holes of L Brackets. Then drill holes on those locations.	
9	Attach the grille to the shell by inserting the bolts through the tabs of L Brackets and holes on the shell; secure them with flange nuts provided.	
10	Reinstall the black plastic cover which was removed in step 2.	
11	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!