



# PATENT PRODUCT






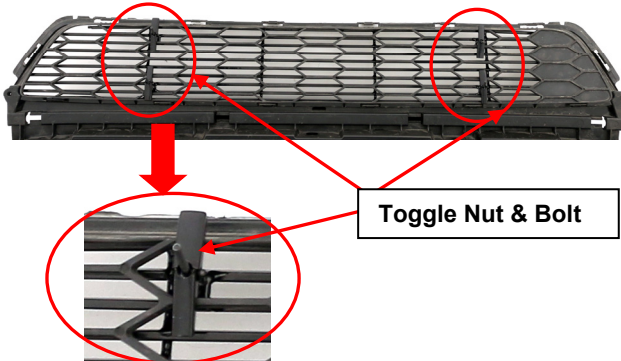

## Grille Installation Instruction

Rev. 150201

<b>Part#</b>	GR08FEI17H	<b>Application</b>	2013 Honda Accord Sedan Lower Bumper
--------------	------------	--------------------	--------------------------------------

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	1	10 Billets	4	Toggle Nut	4	6#-32
	2	Bolt	4	6#-32x2"				

**Install Notes:** Overlay  Replacement  Drill  Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Insert the 6# bolts through the weld tab holes on the billet grille from front side. And install a toggle nut on one bolt.	
3	Center the billet grille onto the factory grille. Insert the toggle nut through the honey comb to the rear of the OEM grille. And then secure the billet grille onto the OEM grille with 2 screws driver from front side of the billet grille.	<div style="display: flex; justify-content: space-around;">    </div> <div style="text-align: center; margin-top: 20px;">  <div style="border: 1px solid black; padding: 2px; display: inline-block; margin-top: 5px;">Toggle Nut &amp; Bolt</div> </div>
4	Make sure the billet grille is centered and tighten the fasteners.	
5	Reinstall the black plastic cover which was removed in step 2.	
6	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the grille a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!