



# PATENT PRODUCT Grille Installation Instruction



Rev. 20201101

<b>Part#</b>	H66557C&J&S	<b>Application</b>	For 2008-2010 Honda Accord Coupe Slight Modification Required For Aero Kit Package
--------------	-------------	--------------------	--


	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
<b>Parts List</b>	#1	Billet Grille	1	Stainless Steel	#3	Screws	4	8#x1"
	#2	Flat Nuts	4	8#	#4	"J" Hooks	4	

**Install Notes:** Overlay  Replacement  Drill  Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Optional: pop hood, remove the black plastic cover (on top of OEM grille) from vehicle. If you are still unable to access the rear, remove the grille shell according to factory manual.	
3	Thread a Screw in each nut welded to the grille. From the rear, place a "J" Hook on each screw. Now thread a Flat Nut on each Screw.	

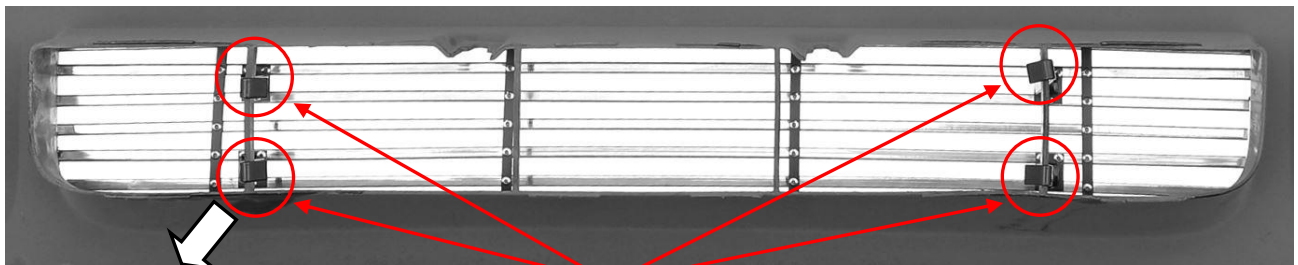

(4) Flat Nuts  
(4) Screws  
(4) "J" Hooks

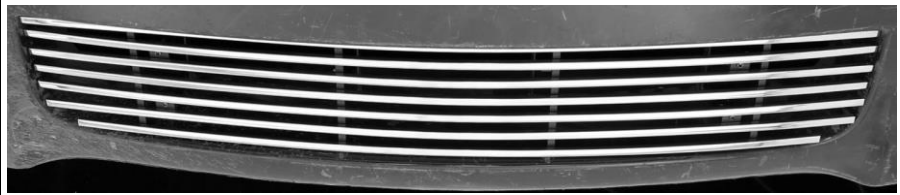4	Make sure the insert is centered and tighten the hardware.	
5	Reinstall the plastic shroud with the fasteners removed in Step 2.	
6	Installation completed.	

The instruction here is for your reference only. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!