



# PATENT PRODUCT

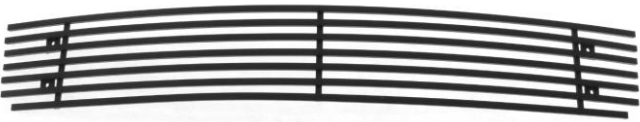

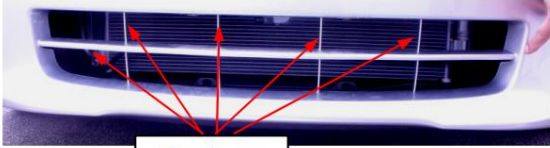
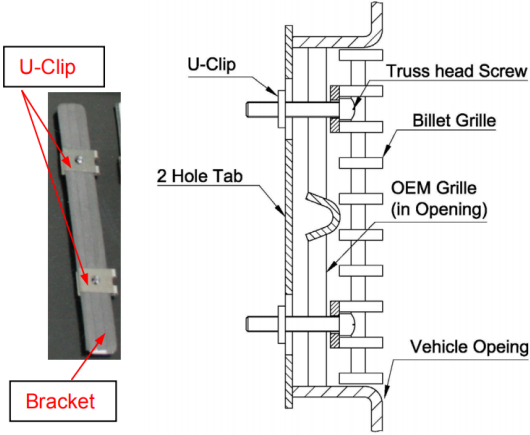
## Grille Installation Instruction

Rev. 190501

<b>Part#</b>	GR08FFE90 C/J/S	<b>Application</b>	<b>For 2008-2010 Honda Accord Sedan Not For V6</b>
--------------	--------------------	--------------------	--

	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
<b>Parts List</b>	1	Billet Grille	1	Stainless steel	3	Truss Head Tapping Screws	4	8# × 1.5 "
	2	Flat Tabs	4		4	U- Clip Nuts	4	8#

**Install Notes:** Overlay  Replacement  Drill  Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell.	
3	Remove the license from the vehicle.	
4	Optional step: (that would get a perfect effect). Paint the front surface of bars into black in the bumper opening, as shown.	
5	Insert the billet grille into the bumper opening from front side, and fasten the billet grille through 4 welded tabs with screws, brackets and U-clips, as shown. Assemble U-clips and bracket together before fastening, as shown.	
6	Reinstall the plastic cover and close the hood. Installation complete!	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!