



# PATENT PRODUCT


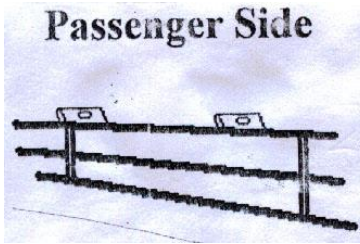
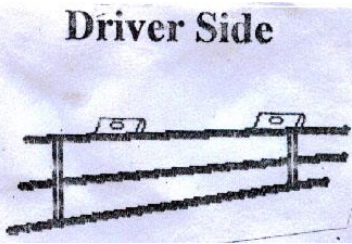
## Grille Installation Instruction

Rev. 190601

<b>Part#</b>	GR08FGA03 C/S/J	<b>Application</b>	<b>For 2003-2005 Honda Accord Sedan</b>
--------------	--------------------	--------------------	---

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	2	Stainless steel	2	Pop Rivets	4	1/8" × 3/8"

**Install Notes:** Overlay  Replacement  Drill  Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell.	
3	Center the billet inserts into the openings with the tabs welded to the billets on top. Mark each tab hole to the openings. Drill a 1/8" hole at each mark. Rivet the billet inserts to the grille shell.	
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p><b>Passenger Side</b></p>  </div> <div style="text-align: center;"> <p><b>Driver Side</b></p>  </div> </div>		
4	Rivet the billet inserts to the grille shell.	
5	Make sure the billet grille is centered and tighten the fasteners, but do not over-tighten.	
6	Reinstall the black plastic cover which was removed in step 2.	
7	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!