

**PN: GR08GFE68T**

**2008 Honda Accord Coupe – Upper Class Series Mesh Grille**

Hardware

4 -- 1/2" × 7/8" L Brackets

6 -- 6-32 Kep Nuts

4 -- 6-32 × 1" Studs

6 -- Washers



2 -- 1/2" × 1/2" L Brackets

2 -- 6-32 × 2" Studs

**NOTE: Instruction for billet grille also applies to stainless steel grille.**

(1) Remove the plastic fasteners holding the motor cover in place. Remove the plastic grille insert from the bumper by releasing the clip on the perimeter of the grille.

If you purchased the lower grille, install now!

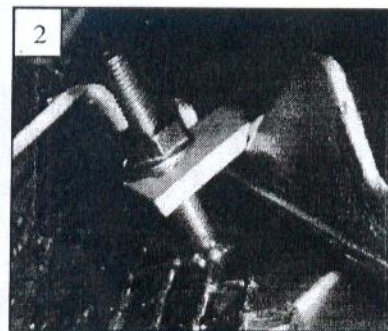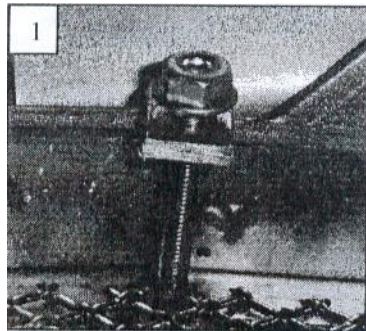

Center the new grille into place. Thread a stud in each nut welded to the grille. Using the shorter L brackets; place these on the lower studs (1). Place a nut onto each stud. Using the longer L brackets; place these onto the upper studs also adding the nuts to these (2). Making sure that the grille is centered; tighten all of the hardware.

(2) Replace the upper motor cover using the factory clips. The two front center clips will line up with the upper grille mounts. Enjoy your new grille.

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!