


PN: GR10FFE39V

07~10 Jeep JK Wrangler – Vertical Billet Grille

Hardware

- 14 -- Metal Brackets
- 28 -- M4×20mm Phillips Screws
- 28 -- M4 Flange Nuts

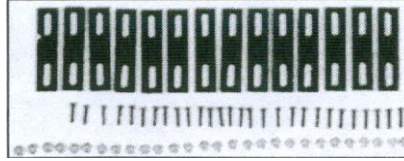

Tools Required

- Phillips Screwdriver
- 4mm Wrench

Figure 1 - included Hardware

- (1) Identify grille No# as shown. The grille No# can be found on the side or back side of each grille.

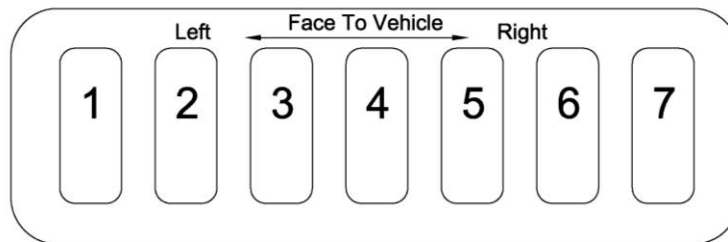


Figure 2- Grille No# Identify

- (2) Inspect product and check components with items listed above.
- (3) Pop Hood, remove plastic shroud at the top and set fasteners aside.
- (4) Optional: Using factory instructions, remove the entire front grille shell (as pictured in all Figures).
- (5) Position the lower Billet Grille onto grille shell cavity (Figure 3).

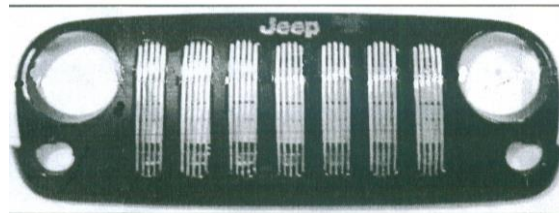


Figure 3 – Front view of positioning lower Billet Grille

- (6) Loosely attach the Billet Grille by holding the Metal Brackets behind factory grille shell and inserting the Phillips Screws (from the front) through the Billet Grille holes and Metal Brackets, secure them with Flange Nuts provided (Figure 3).

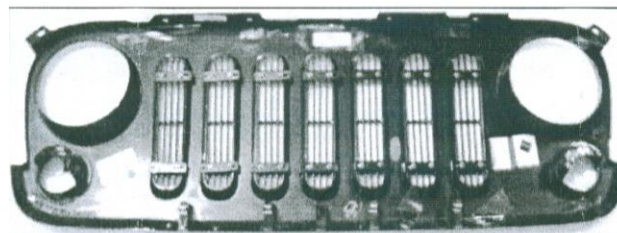


Figure 4 – Rear view of vehicle's shell; Billet grilles attached with Metal Brackets and Flange Nuts

- (7) Repeat Steps 5 and 6 for top section of Billet Grille.
- (8) Once the Billet Grilles are loosely attached, center them and tighten all Phillips Screws at the same rate.
- (9) Reinstall the plastic shroud with the fasteners removed in Step 3.

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!