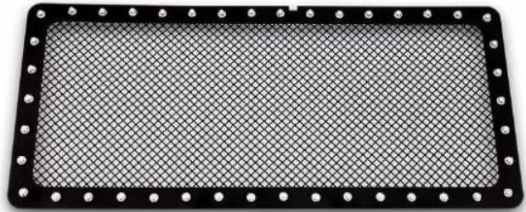

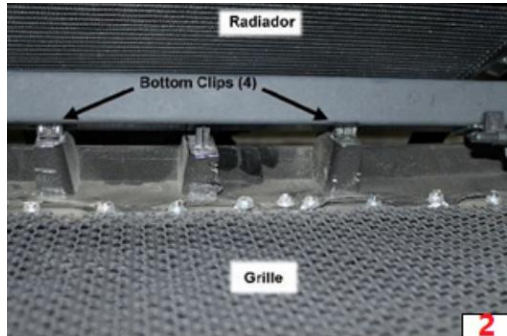
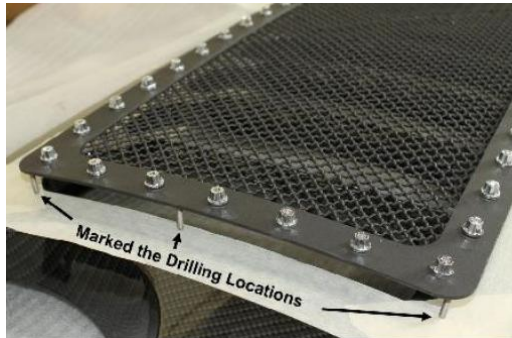


Part#	JL5819H	Application	For 2007-2018 Jeep Wrangler JK
-------	---------	-------------	--------------------------------

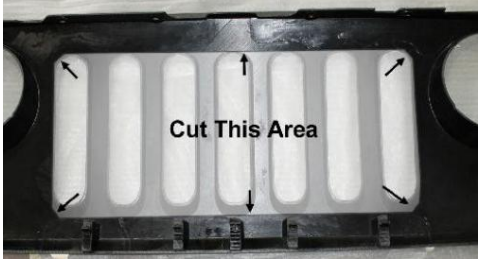



Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Mesh Grille	1	Stainless steel	3	Lock Nut	12	M4
	2	Flat Washer	12	M4				

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Open and lift hood. Locate and remove the (6) plastic fasteners across the top of the shell using a flat screw driver.	
3	Slightly tilt the shell forward and locate the (4) clips at the bottom of the shell. Use a flat screw driver to remove these clips. Then remove shell from vehicle.	
4	Protect the finish of the shell by using masking tape around the edge of the vertical vents. Place the Grille over the shell and mark the drilling locations. Drill out the marked locations using a 1/4" drill bit. <u>Important! Always eye protection when drilling or cutting.</u>	

The instruction here is for your reference only. You may need to bend the grille a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!

Part#	JL5819H	Application	For 2007-2018 Jeep Wrangler JK
-------	---------	-------------	--------------------------------

<p>5</p>	<p>Cut the shell as shown.</p> <p><u>NOTE:When cutting the shell, please leave enough material around the drilled holes.</u></p> <p>After cutting the vertical bars off the shell, place the Grille over the shell and attach it by securing the washers and nuts onto the studs welded on the rear of the Mesh Grille.</p>	 
<p>6</p>	<p>If you place the Grille over the shell and it doesn't fit flush. Trim the shell where the rivets are located.</p> <p>Tighten all hardware at this time.</p>	 
<p>7</p>	<p>Re-install the shell with the new mesh grille back to the vehicle using the OE fasteners you previously removed.</p>	
<p>8</p>	<p>Installation completed!!!</p>	

The instruction here is for your reference only. You may need to bend the grille a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!