

Part#	GR12GFG79T/H	Application	For 2009-2010 Lincoln MKS
-------	--------------	-------------	---------------------------

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Mesh Grille	1	Stainless steel	3	K-Lock Nuts	6	6-32
	2	Brackets	6		4	Studs	6	6-32 × 1"

Install Notes: Overlay Replacement Drill Cut


Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Remove the factory lower cover from beneath the front of the vehicle. There are 5 bolts and 7 plastic pop clips. (Fig 1) This will give you access to the backside of the bumper grille area. Remove the 2 plastic covers on the lower front of the factory bumper by unlatching them from the backside. (Fig 2)	
3	You will need to remove the plastic bars in the factory bumper opening. You can use a hacksaw blade, grinding wheel etc. Leave approx 1/4" of the bar. (Fig 3) Take the mesh grille and insert it into the factory bumper opening. Thread a stud in each nut welded to the grille. (Fig 4) From the backside of the grille, take the six brackets and install them onto the threaded studs that are on the mesh grille. Make sure they latch over the factory bumper opening and install the 6-32 k-lock nuts and tighten. (Fig 5)	



Fig 1

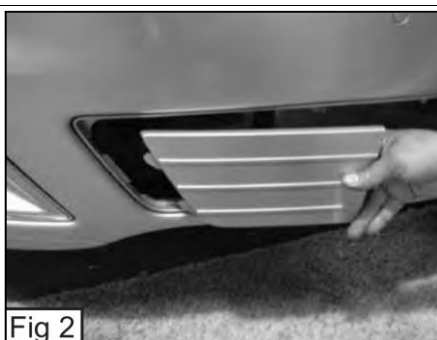


Fig 2



Fig 3



Fig 4



Fig 5

4	Make sure the billet grille is centered and tighten the fasteners. but do not over-tighten.
5	Reinstall the 2 plastic covers on the front lower bumper area and the lower cover from underneath the vehicle.
6	Installation completed!!!

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result.

Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation.

We are not responsible for any damage caused by the installation. Thank you for choosing our product!