

Part#	GR12HEB17A/H	Application	<b>For 2007-2010 Lincoln MKX</b>					
-------	--------------	-------------	----------------------------------	--	--	--	--	--

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	1	Aluminum	4	Powder Coated Flat Brackets	4	
	2	Studs	6	10 -24 x 2"	5	Powder Coated Hook Brackets	2	
	3	K-Lock Nuts	6	10-24				

Install Notes: Overlay  Replacement  Drill  Cut

Step	Description	illustration
------	-------------	--------------

1	Identify the grille & hardware with parts list.	
---	---	--

2	Remove the bolts and plastic clips that hold the front fascia to the vehicle. (Fig 1&2)	
---	---	--



3	Remove the small bolts from the edge of the wheel well. (Fig 3&4)	
---	---	--

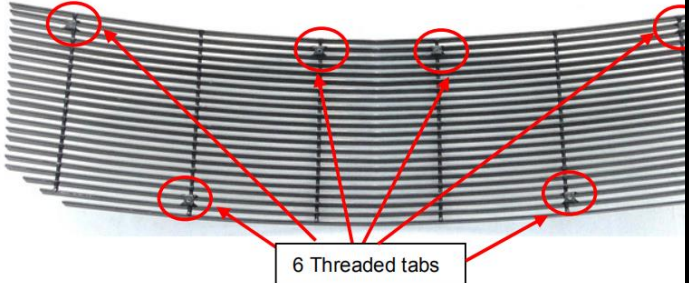



4	Separate the sides of the front fascia from the fender sides. (Fig 5&6)	
---	---	--

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!

Part#	GR12HEB17A/H	Application	For 2007-2010 Lincoln MKX
5	Lay a blanket or other soft surface in front of the front fascia. Rock the entire front fascia forward and rest it on the blanket. (Fig 7)		
6	Remove the two cutter nuts that hold the grille shell to the front fascia. (Fig 8)		
7	Remove the three remaining bolts that hold the grille shell to the front fascia. (Fig 9)		
8	Separate the grille shell from the front fascia. (Fig 10)		
9	Separate the chrome face of the grille shell from the black plastic section that bolts to the front fascia.		
10	Reattach the black plastic section of the grille shell onto the front fascia using the factor hardware from steps 6 and 7.		
11	Rotate the front fascia back into the installed position. Do not fully reattach at this time.		

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!

Part#	GR12HEB17A/H	Application	For 2007-2010 Lincoln MKX
12	Install the fully threaded studs into the threaded tabs on the backside of the billet grille.		
13	Center the billet grille into the factory opening and place the powder coated hook brackets over the fully threaded studs with the hook end over the lip on the vehicle. Hold in place using the k-lock nuts.		
14	Place the powder coated flat brackets over the remaining fully threaded studs and hold in place using the k-lock nuts.		
15	Make sure that the billet grille is centered and tighten all hardware.		
16	Reattach the front fascia to the vehicle using the hardware from steps 2 and 3.		
17	Installation completed!!!		

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!