

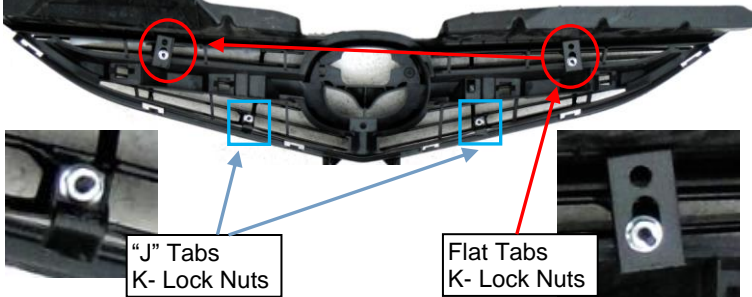



Part#	GR13HFF44A&H	Application	For 2008-2010 Mazda Mazda 5
-------	--------------	-------------	-----------------------------

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	1	Aluminum	4	Truss Head Screws	4	6-32 × 2"
	2	Flat Tabs	2		5	K- Lock Nuts	4	6-32
	3	"J" Tabs	2					

Install Notes: Overlay  Replacement  Drill  Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Pop Hood, remove plastic shroud at the top and set fasteners aside.	
3	Before install the main upper grille, cut off the "wing" of the OEM shell. Please keep the ring outside of the logo. Trim the edge of the ring.	 need to be cut off
4	Overlay the grille on top of OEM grille. Place the screws through the holes of the tabs welded to the back of the billet grille. Secure the screws using the tabs and k- lock .	 "J" Tabs K- Lock Nuts Flat Tabs K- Lock Nuts
5	Make sure the billet grille is centered and tighten the fasteners.	
6	Reinstall the black plastic cover which was removed in step 2.	
7	Installation completed.	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!