



PATENT PRODUCT

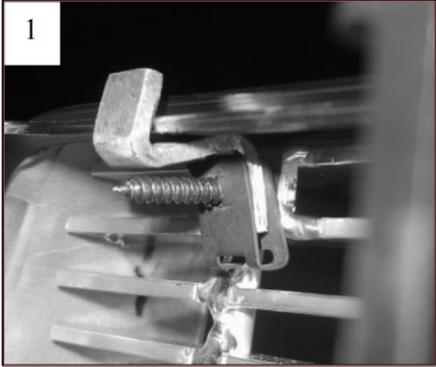
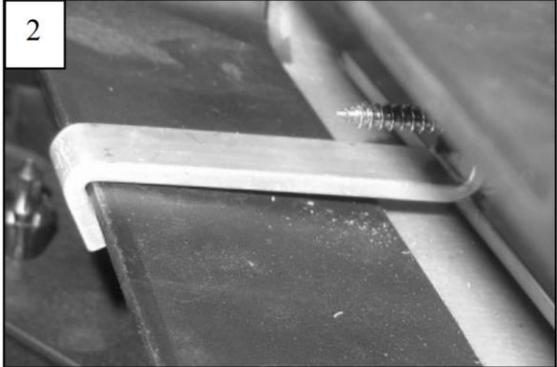
Grille Installation Instruction

Rev. 181201

Part#	GR14FEB25C/S/J	Application	For 2009-2014 Nissan Maxima		
--------------	----------------	--------------------	------------------------------------	--	--

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	1	Stainless steel	4	J Hooks	2	1 "
	2	J Hooks	2	2.5"	5	Screws (#6 Head)	4	#8×1 1/4"
	3	U Nuts	4	#8				

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Open the hood and remove the factory plastic radiator cover. Remove the factory air intake plate on the driver side of the vehicle. Now remove the factory grille shell; release the molded clips along the perimeter of the grille.	
3	Slide the u-nuts onto J hooks. Insert the screws into the tabs on the billet.	
4	Start to thread the shorter J hooks onto the top screws (1). Start to thread the longer J hooks onto the lower screws (2).	
	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>1</p> </div> <div style="text-align: center;">  <p>2</p> </div> </div>	
5	Center the grille in place. Wrap the hooks around plastic bars in the openings.	
6	Use a Phillips screwdriver to tighten the hardware. Re-install the grille onto the vehicle.	
7	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!