


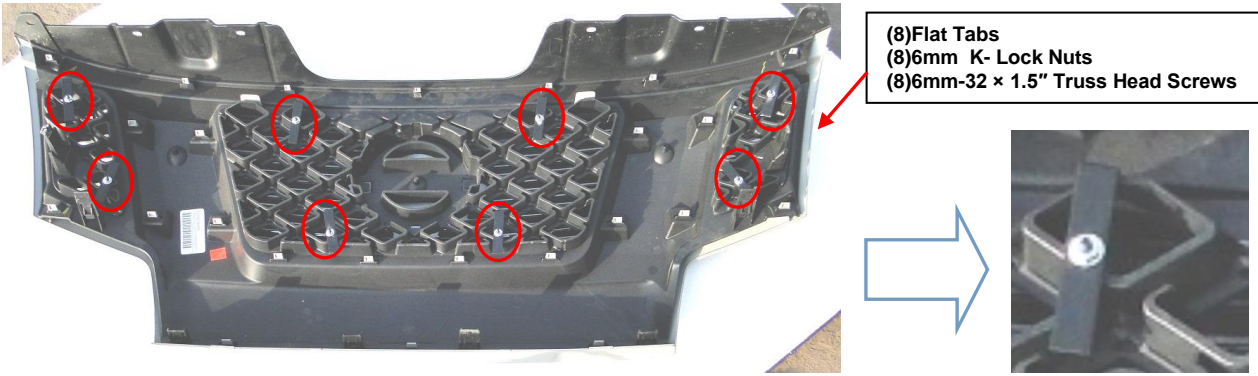

PATENT PRODUCT

Grille Installation Instruction

| | | | |
|-------|-----------|-------------|-----------------------------|
| Part# | N66640A&H | Application | For 2009-2012 Nissan Xterra |
|-------|-----------|-------------|-----------------------------|

| Parts List | Item | Part Name | QTY | Description | Item | Part Name | QTY | Description |
|------------|------|-------------------|-----|---------------|------|--------------|-----|-------------|
| | 1 | Billet Grille | 3 | Aluminum | 3 | Flat Tabs | 8 | |
| | 2 | Truss Head Screws | 8 | 6mm-32 x 1.5" | 4 | K- Lock Nuts | 8 | 6mm |

Install Notes: Overlay Replacement Drill Cut

| Step | Description | Illustration |
|------|---|---|
| 1 | Identify the grille & hardware with parts list. |  |
| 2 | Optional: pop hood, remove the black plastic cover (on top of OEM grille) from vehicle. If you are still unable to access the rear, remove the grille shell according to factory manual. | |
| 3 | Center the billet grille into the opening of the shell, and place the screws through the holes of the tabs welded to the rear of the billet grille, then secure it using the tabs and k- lock nuts. |  <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;"> <p>(8) Flat Tabs (8) 6mm K- Lock Nuts (8) 6mm-32 x 1.5" Truss Head Screws</p> </div> |
| 4 | Make sure the insert is centered and tighten the hardware, but do not over-tighten. | |
| 5 | Reinstall the plastic cover with fasteners removed in Step 2. | |
| 7 | Installation completed. |  |

The instruction here is for your reference only. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!