



Grille Installation Instruction

Rev. 200801

Part#	GR14FGI92C	Application	2004-2006 Nissan Titan With Logo Show/2007-2007 Nissan Titan Classic Model, With Logo Show/2004-2007 Nissan Armada With Logo Show
-------	------------	-------------	------------------------------------------------------------------------------------------------------------------------------------------

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	4	Stainless steel	5	Truss Head Screws	10	10-24×2"
	2	Mounting Clips	8		6	Lock Nuts	10	10-24
	3	L Shape Tabs	4		7	Truss Head Tapping Screws	8	8×5/8"
	4	U-Clip Nuts	8	8#				

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell.	
3	Start with the upper section. Remove the stock grille shell by using a straight blade screwdriver and turning the Plastic Hold Downs a quarter turn to release. There are (4) across the top and (3) on the bottom and (2) on the left and right side. Step 2 will show the locations of the left and right release screws that are not visible in the lower corners of the stock grill.	
4	On the lower left and right outsides of the grille shell there is (1) quarter turn screw that can be reached by going thru the lower opening on the side of the grille as shown above.	
5	Place masking tape on all of the painted and or chrome surfaces to protect the grille from scratches during install. Next remove the plastic shroud covers on the outer left & right side of the stock grille shell. You may have to use a flat blade screwdriver to release.	
6	When installing (Logo Covered or No Logo), you will need to remove the Nissan emblem by using a wide flat blade screw driver or putty knife to pry it off. The emblem is held on by double sided tape. Insert the billet grille and center into the openings. Use the supplied 10-24×2"Bolts & Nuts for all locations of the billet grille. On the side grilles for top locations only. Secure all bolts, being careful not to over tighten. As shown above.	
7	If there are any of the quarter turn screws remaining on the vehicle. You need to remove these and place them back on the stock grille shell. Make sure the Head of the plastic quarter turn screw ins square and insert, then squeeze and make a quarter turn back in place.	
8	Next replace the plastic covers that were removed in step 3.	
9	Make sure the billet grille is centered and tighten the fasteners.but do not over-tighten.	
10	Next simply re-install the stock grille shell by lining up the plastic quarter turn screws with their original stock locations and slightly pushing them back in place.	

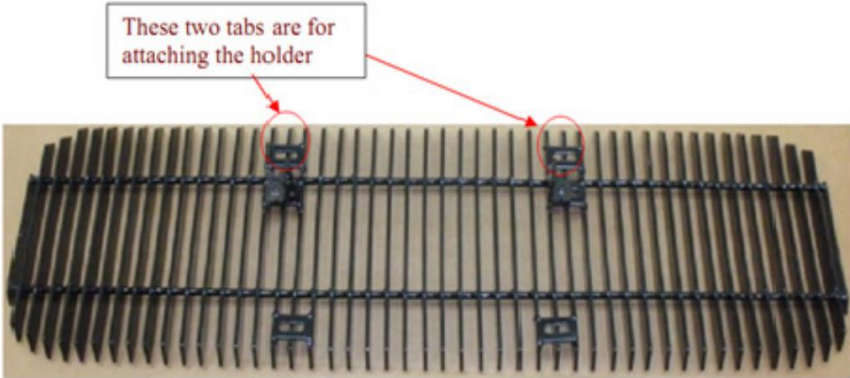
The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!

Part#	GR14FGI92C	Application	2004-2006 Nissan Titan With Logo Show/2007-2007 Nissan Titan Classic Model, With Logo Show/2004-2007 Nissan Armada With Logo Show
-------	------------	-------------	------------------------------------------------------------------------------------------------------------------------------------------

11	Continue to the lower section. Remove the plastic bumper shroud from the bumper.		
12	Place the U-Clips on the short leg of the supplied hardware.		
13	Attach the short leg of the L shape tabs to the grille, using the #8 screws.		
14	Center the billet/SS. grille in the plastic shroud with the polished surface flush with the face of the shroud.		
15	Mark the location of the 4 slots in the long leg of the brackets on the plastic shroud. And the drill 1/8" hole in each of the marked location.		
16	Place the U-Clips over the (4) holes just drilled, and attach the grille assembly to the plastic shroud with the supplied #8 screws.		
17	If your vehicle is equipped with a license plate holder perform the following 3 steps, otherwise skip to 9.		
18	At each corner drill a 3/16" hole 1 3/4" from the outside top edges and 3/8" down from the top edges.		
19	Using a saw, remove the (2) raised bosses on the back of the holder.		
20	Using the tab at the between of product and license plate holder		

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!

Part#	GR14FGI92C	Application	2004-2006 Nissan Titan With Logo Show/2007-2007 Nissan Titan Classic Model, With Logo Show/2004-2007 Nissan Armada With Logo Show
-------	------------	-------------	------------------------------------------------------------------------------------------------------------------------------------------

21	<p>Remove the (4) screws holding the billet grille to the brackets. And attach the holder using the supplied #10X2"bolts and nuts thru the bottom most tabs on the billet grille.as shown in P5.</p>	
22	<p>Re-install the plastic shroud into the bumper.</p>	
23	<p>Re-attach the grille to the brackets on the shroud.</p>	
24	<p>Installation completely!!!</p>	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!