

PN: GR14GFG52H

2010 Nissan Altima Coupe – Main Upper Mesh Grille


Hardware

4 -- 6-32×2 1/2" Screws

4 -- 6-32 K-Lock Nuts

4 -- Flat Tabs

- (1) Open the hood and remove the four push pins retaining the top of the grille to the support by pushing in on the center of the pins until they click. Lift straight up to remove the push pins (save pins for reinstallation).
- (2) Apply protective tape around the upper and lower grille openings to protect the paint.
- (3) To remove the stock grille, you must first squeeze the upper two retaining clips and pull the top of the grille forward.

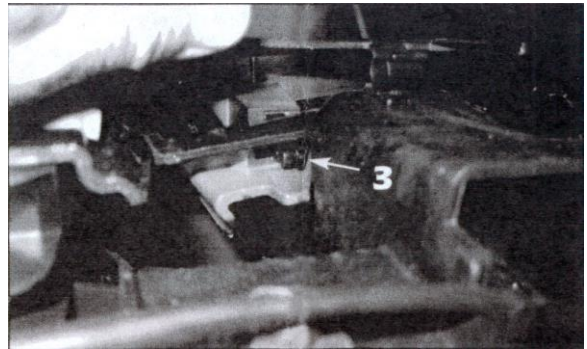

- (4) Drill 1/4" hole on the 4 sites marked on the shell. Thread a screw in each nut welded to the grille. From the rear, place a tab on each screw. Now thread a nut on each screw.
- (5) Make sure the insert is centered and tighten the hardware.
- (6) Reinstall the factory upper push pins to secure the top of the grille.

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!