



# PATENT PRODUCT


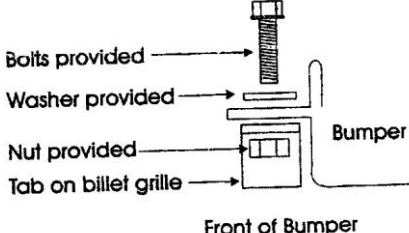
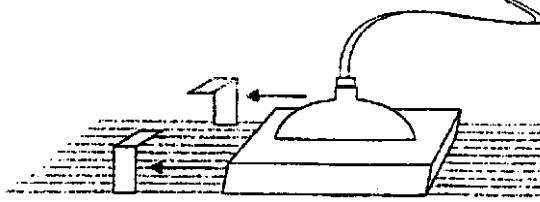
## Grille Installation Instruction

Rev. 190801

<b>Part#</b>	GR14HEA17 C/S/J	<b>Application</b>	<b>For 1995-1997 Nissan Hardbody Pickup</b>
--------------	--------------------	--------------------	---

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	2	Stainless steel	3	Washers	4	1/4"
	2	Hex Bolts	4	1/4" -20×3/4"	4	Nuts	4	1/4" -20

**Install Notes:** Overlay  Replacement  Drill  Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell.	
3	Remove bumper. Remove stock blinker lights.	
4	Pre-fit grille into bumper. Use bolts, nuts and washers provided to install grille to pre-existing holes on the bumper.	
5	Center the billet grille into the opening of the factory grille shell. Secure the bolt to the threaded holes on the front of the grille. Be sure the bolts are through the OEM grille shell.	
6	Insert blinker light, sliding it under tabs as shown below. This should be a tight fit if the fit is not tight, rivet where necessary.	
7	Make sure the billet grille is centered and tighten the fasteners, but do not over-tighten.	
8	Reinstall the black plastic cover which was removed in step 2-3.	
9	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!