

## Grille Installation Instruction

Rev. 190201

Part#	GR14HEF00A/H	Application	For 2003-2004 Infiniti G35 Sedan
-------	--------------	-------------	----------------------------------

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	1	Aluminum	4	Lock Washers	2	1/4"
	2	Nuts	2	1/4" -20	5	Hex Bolts	2	1/4" -20×3/4"
	3	Flat Washers	2	1/4"				


Install Notes: Overlay  $\times$  Replacement  $\sqrt{}$  Drill  $\times$  Cut  $\times$ 

Step	Description	illustration				
1	Identify the grille & hardware with parts list.					
	Demove the feetery wills shall use a small corough	ver to pull the center from each factorier. Two of the factorier will be				

Remove the factory grille shell; use a small screwdriver to pull the center from each fastener. Two of the fasteners will be re-used; do not discard the fasteners. Next, lightly pull the top of the grille assembly forward. Use your fingers to depress the molded clips along the bottom of the grille. The can now be removed.

Center the billet insert into the opening. The lower mounting tabs align into the factory holes. Use a 1/4" bolt, nut and washer to secure the lower tabs.

Use the factory fasteners to attach the upper mounting brackets. These brackets align to the factory holes also. It may be necessary to slightly bend the upper brackets so they align correctly.

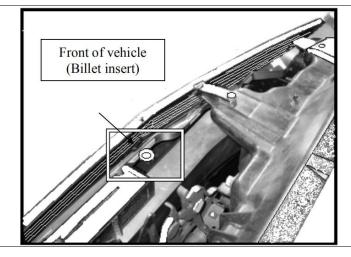

- 4 Make sure the billet grille is centered and tighten the fasteners, but do not over-tighten.
- 5 Close the hood and check the alignment of the billet insert. If necessary, remove the insert and adjust the brackets.
- 6 Installation completed!!!

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result.

Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation.

We are not responsible for any damage caused by the installation. Thank you for choosing our product!