
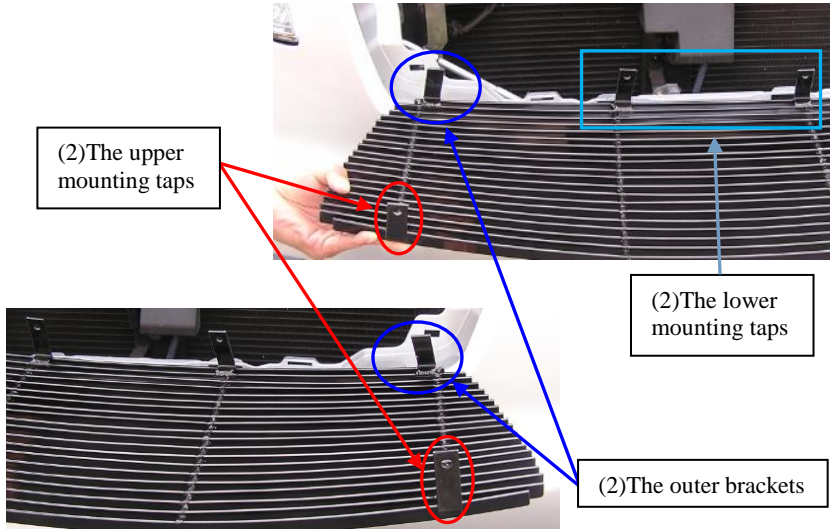
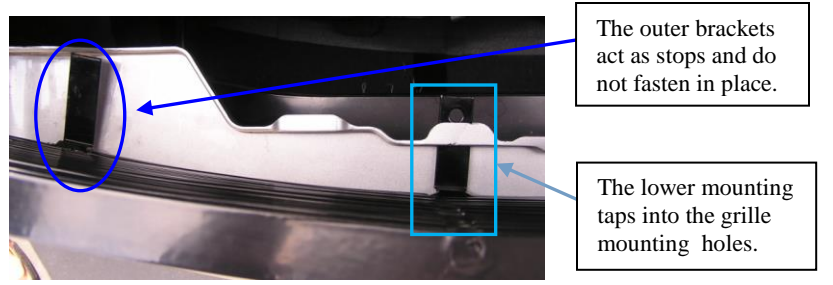


| | | | | | | | | |
|-------|--------------|-------------|---|--|--|--|--|--|
| Part# | GR14HEF06A/H | Application | For 2003-2008 Infiniti FX35 / FX45 | | | | | |
|-------|--------------|-------------|---|--|--|--|--|--|

| Parts List | Item | Part Name | QTY | Description | Item | Part Name | QTY | Description |
|------------|------|---------------|-----|-------------|------|-------------------|-----|-------------|
| | 1 | Billet Grille | 1 | Aluminum | 2 | Factory Fasteners | 4 | |

Install Notes: Overlay Replacement Drill Cut

| Step | Description | illustration |
|------|---|--|
| 1 | Identify the grille & hardware with parts list. |  |
| 2 | Optional (for vehicles with black plastic cover under hood), Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell. | |
| 3 | Remove the four plastic fasteners along the top using a Phillips screwdriver. There are two black plastic retaining fasteners on each end of the grille. Use a slotted screwdriver to twist the fasteners; Pull the grille forwards and release the molded clips along the bottom of the grille. Push the grille from behind to remove. If installing a bumper billet, install the bumper billet. | |
| 4 | Center the billet into the opening. Align the lower mounting tabs into the grille mounting holes (the outer brackets act as stops and do not fasten in place). It may be necessary to slightly bend the brackets so they align properly. Use two of the factory fasteners to secure the lower tabs. |  |
| 5 | The upper mounting tabs align to the factory mounting holes. It may be necessary to slightly bend the brackets so they align properly. Use the factory fasteners to secure the billet. Carefully check the clearance to the hood. If the billet is not aligned properly, remove the hardware and adjust the mounting tabs. |  |
| 6 | Reinstall the black plastic cover which was removed in step 2. | |
| 7 | Installation completed!!! | |

The instruction here is for your reference only. You may need to bend the grille a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!