



# PATENT PRODUCT

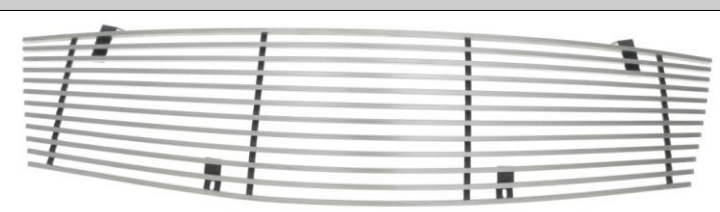
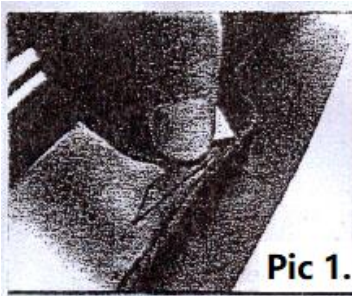
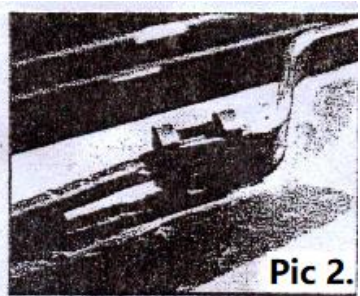
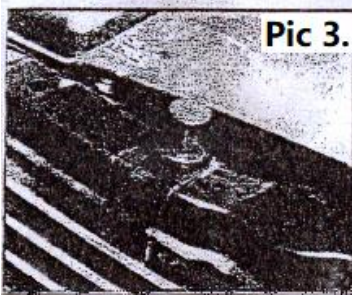
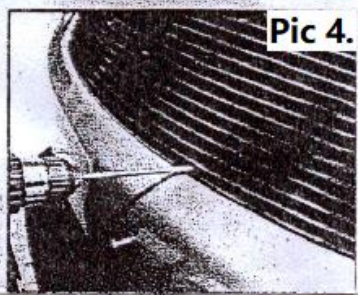
## Grille Installation Instruction

Rev. 180801

<b>Part#</b>	GR14HEF08C/J	<b>Application</b>	For 2005-2007 Infiniti M35 Sedan
--------------	--------------	--------------------	----------------------------------

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	1	Stainless steel	3	Truss Head Screws	2	8X1.5"
	2	U-Clip Nuts	2	8#				

**Install Notes:** Overlay  Replacement  Drill  Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Remove the factory grille shell, and then use a small screwdriver to pull the center from each fastener. The fasteners will be re-used, do not discard the fasteners. Next, lightly pull the top of the grille assembly forward. Depress the two molded clips along the bottom and one in each corner. The grille can now be removed. (Pic 1.)	
3	Center the billet insert into the opening. The lower mounting tabs align with the factory mounting holes. Slide the u-nuts over the plastic lip. (Pic 2.)	 
4	The upper mounting tabs align to the factory mounting holes. It may be necessary to slightly bend the brackets so they align properly. Use the factory fasteners to secure the billet on top. (Pic 3.)	 
5	Secure the bottom with the machine screws provided. Do not over-tighten the hardware. Carefully check the hood clearance to the billet grille. Re-move the billet and adjust the brackets if need. (Pic 4.)	
6	Installation completed.	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result.  
 Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation.  
 We are not responsible for any damage caused by the installation. Thank you for choosing our product!