


Part#	GR14HFH85C	Application	For 2007-2008 Infiniti G35 Sedan					
-------	------------	-------------	---	--	--	--	--	--

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	1	Stainless steel	4	Screws	4	#8 × 1 1/4"
	2	U-Clip Nuts	4	#8	5	Plastic Retainers	2	
	3	Flange Brackets	4					

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Remove six plastic fasteners along the top of the grille; use a small screwdriver to pull the center from each fastener(1). Remove five 10mm bolts securing the radiator cover.	
3	Remove two 10mm bolts securing the coolant overflow tank; slide it back for clearance(2).Next, push the radiator cover back; depress the clips securing a wiring harness to the cover, remove (2).	
4	Remove five 10mm bolts behind the grille. Depress the molded clips retaining the grille and remove from the front.If installing a bumper billet, install the bumper billet	
5	Center the billet insert into the opening. The mounting tabs align with the factory mounting holes.	
6	Slide the upper brackets into the mounting holes (it may be necessary to slightly bend the upper brackets so they align correctly).Use the plastic retainers to retain the upper mounting tabs.	
7	Slide the u-nuts onto the flange brackets supplied (3).Secure the four lower mounting tabs to the bumper cover using the screws from the front and the flange brackets with u-nuts from the back. Tighten the hardware.	
8	Re-install the wiring harness and radiator cover.Secure the coolant overflow tank.	
9	Installation completed!!!	
10	Installation completed!!!	

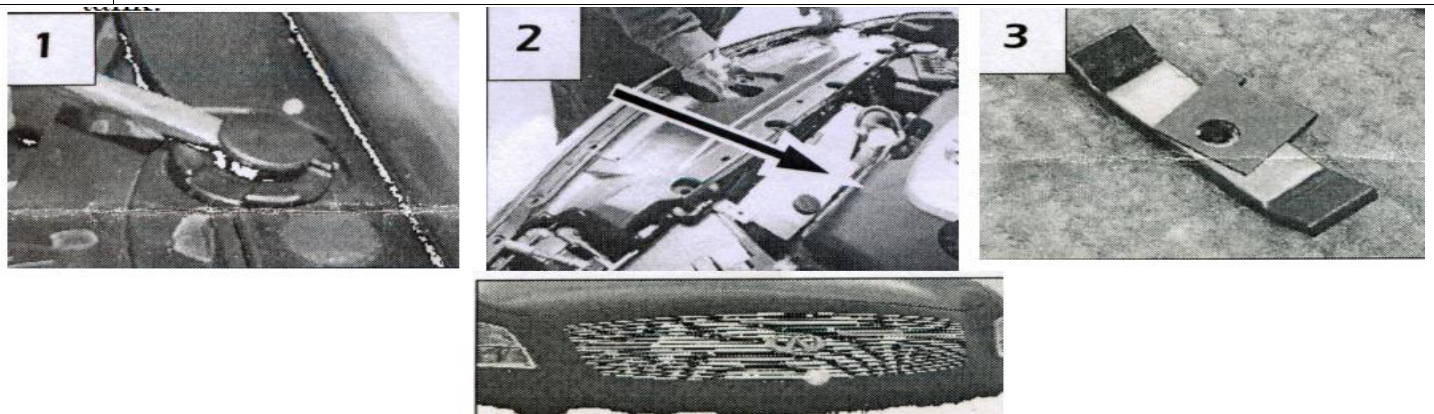

The instruction here is for your reference only. You may need to bend the grille a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!