




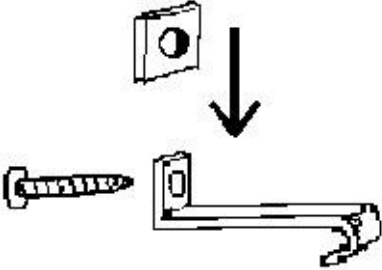
Grille Installation Instruction

Rev. 190801

Part#	GR20FED30A/H	Application	For 2005-2007 Toyota Sequoia					
-------	--------------	-------------	-------------------------------------	--	--	--	--	--

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	1	Aluminum	3	Truss Tapping Screws	2	8×1"
	2	"J" Hook Tabs	2		4	U-Clip Nuts	2	6-32

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Optional (for vehicles with black plastic cover under hood), Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell. If you are still unable to access the rear, remove the grille shell and reattach after installation.	
3	Insert a 1" screw into the tabs on the insert. Slide a "J" hook, washer and U-clip nut from the back of the insert (thread the nuts by head).	
4	Center the billet over the bumper opening; wrap the "J" hooks around the plastic bars in the bumper opening. Use a screwdriver and 5/16 wrench to snug the hardware down until the billet is held firmly in place.	
5	Make sure the billet grille is centered and tighten the fasteners, but do not over-tighten.	
6	Reinstall the black plastic cover which was removed in step 2.	
7	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the grille a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!