

PATENT PRODUCT

Grille Installation Instruction


Rev. 20231101

| | | | |
|--------------|-------------|--------------------|---|
| Part# | T65578C&J&S | Application | For 2009-2012 Toyota RAV4 Not for Limited |
|--------------|-------------|--------------------|---|

| Parts List | Item | Part Name | QTY | Description | Item | Part Name | QTY | Description |
|------------|------|---------------|-----|-----------------|------|-------------|-----|-------------|
| | #1 | Billet Grille | 2 | Stainless Steel | #3 | Toggle Nuts | 8 | #6 |
| | #2 | Studs | 8 | #6X2" | | | | |

Install Notes: Overlay ☒ Replacement ☐ Drill ☒ Cut ☐

| Step | Description | illustration |
|------|--|--------------|
| 1 | Identify the grille & hardware with parts list. | |
| 2 | Optional: pop hood, remove the black plastic cover (on top of OEM grille) from vehicle. If you are still unable to access the rear, remove the grille shell according to factory manual. | |
| 3 | Hold the billet grille against the OEM grille shell, center and mark (4) holes for drilling. Remove billet grille and drill holes according to your marks. | |
| 4 | Center the billet grille against the OEM grill shell. Thread a Stud in each hole of tab welded to the grille. Secure billet grille using the Toggle Nuts from the back side of the grille shell. | |

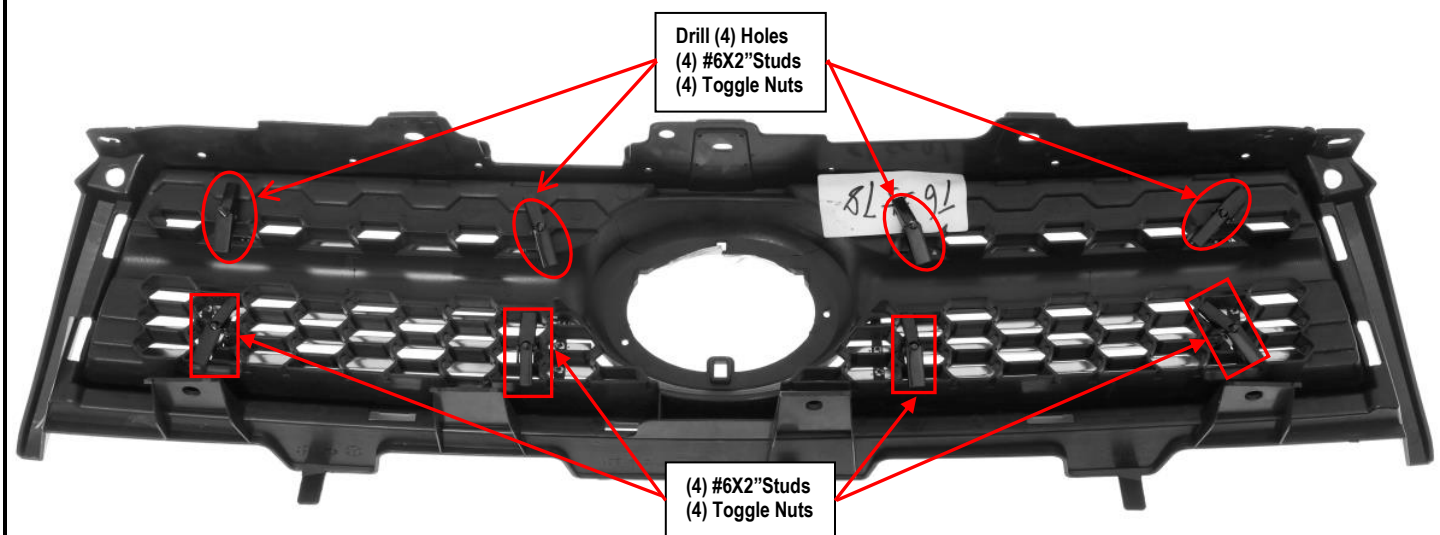

| | | |
|---|--|--|
| 5 | Make sure the insert is centered and tighten the hardware. | |
| 6 | Reinstall the plastic shroud with the fasteners removed in Step 2. | |
| 7 | Installation completed. |  |

The instruction here is for your reference only. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!