
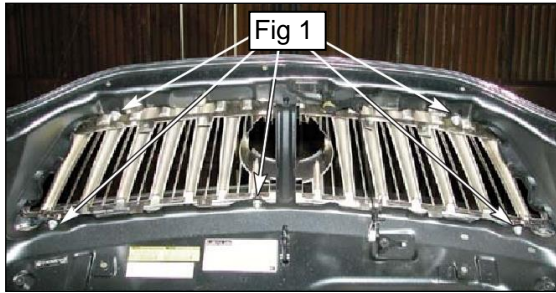



Part#	T75486T/H	Application	For 2004-2006 Lexus RX330
-------	-----------	-------------	---------------------------

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Mesh Grille	1	Stainless steel	4	Nylon Lock Nuts	6	10-24
	2	Studs	3	10-24×2"	5	Studs	3	10-24×1.5"
	3	Washers	6					

Install Notes: Overlay  Replacement  Drill  Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Open the hood and remove the five (5) factory 10mm hex nuts securing the grille to the hood.(Fig 1)	
3	You must squeeze the small center clip (where shown) before you can remove the factory grille from the hood.(Fig 2)	
4	Unclip the grille from the hood and pull it straight off to remove. Place the grille onto a clean work bench for emblem removal.(Fig 3)	

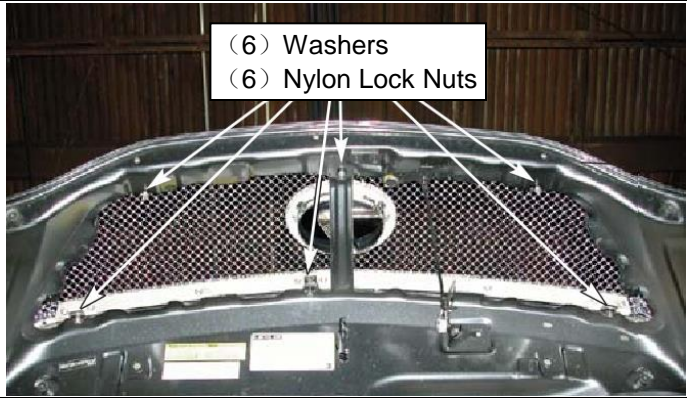

5	Align the screws to the factory holes. It may be necessary to slightly bend the upper screws by hand so they align properly. Secure the grille using the washers and nylon lock nuts.	
6	The factory logo may be used on the mesh grille if the backside is trimmed down with a die grinder or similar tool.	
7	Make sure the grille is centered and tighten the fasteners.	
8	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the grille a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!