


Hitch Installation Instruction



The instruction here is for your reference only. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!

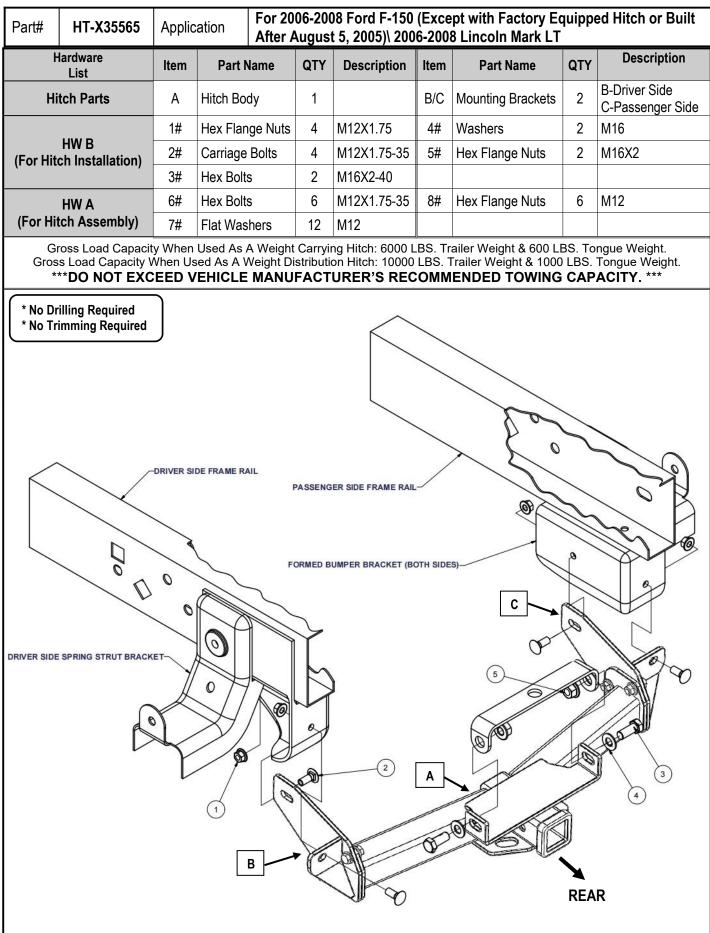

Hitch Installation Instruction

Part#	HT-X35565	Application	For 2006-2008 Ford F-150 (Except with Factory Equipped Hitch or Built After August 5, 2005)\ 2006-2008 Lincoln Mark LT
-------	-----------	-------------	---

Step	Description			
1	Assemble Hitch Body (A) and Mounting Brackets (B , C) with (6) M12X1.75-35mm Hex Bolts, (12) M12 Flat Washers, (6) M12 Hex Flange Nuts.(Hardware in " HW A ").			
2	NOTE: If necessary, loosen (4) bumper bolts for improved hitch alignment.			
3	Raise hitch into position between frame rails.			
4	Install M16 fasteners into bumper with loops as shown.			
5	Install remaining M12 fasteners as shown into each bumper bracket.			
6	Torque all M16 fasteners to 210 lb-ft and all M12 fasteners to 58 lb-ft.			
***Periodically Check The Receiver Hitch To Ensure That All Fasteners *** Are Tight & All Structural Components Are Sound.				

The instruction here is for your reference only. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!