iBoard®




iBoard[®] by APS

PART#: IB-P058C&J

READ INSTRUCTIONS CAREFULLY BEFORE START ING INSTALLATION. REMOVE CONTENTS FROM BOX AND VERIFY ALL PARTS ARE PRESENT. ASSISTANCE IS RECOMMENDED.

*ROCKER PANEL MOUNT *NO DRILLING REQUIRED

Fastener Size	Tightening Torque (ft-lbs)	Required
6mm	6-7	X
8mm	16-18	√
10mm	31-32	Х
12mm	56-58	Х
14mm	92-94	Х

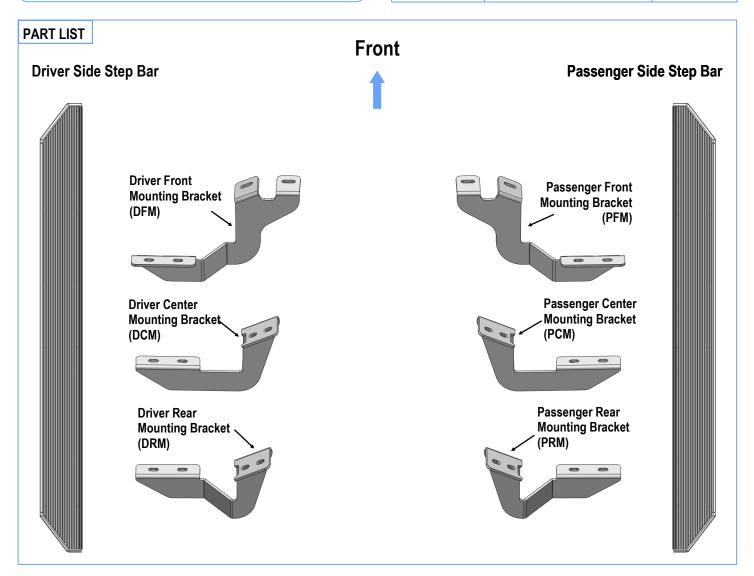

Customer Support: info@iboardauto.com

iBoard®



Hardware Package A (For Bracket Installation)							
Item	QTY	Description	Item	QTY	Description		
1#	12	M8X1.25-25mm Hex Bolts	3#	12	M8 Lock Washers		
2#	12	M8 Flat Washers					







1#

2#

3#

Hardware Package B (For Step Bar Installation)							
Item	QTY	Description	Item	QTY	Description		
1#	12	M8X1.25-35mm Carriage Bolts	3#	12	M8 Nylon Lock Nuts		
2#	12	M8 Large Flat Washers	4#	6	Sliders (Packed with Mounting Brackets)		



:








4#

iBoard[®]



STEP 1


Start installation from the driver side front of the vehicle, remove the existing (2) factory bolts, (or plastic plugs) (Fig 1). This will be the mounting location for the Driver Front Mounting Bracket.



(Fig 1) Driver Side Front Mounting Location


STEP 2

Select the Driver Front Mounting Bracket, attach the Bracket to the vehicle using the included (2) M8x1.25-25mm Hex Bolts, (2) M8 Lock Washers and (2) M8 Flat Washers, (Fig 2). Do not fully tighten hardware at this time.

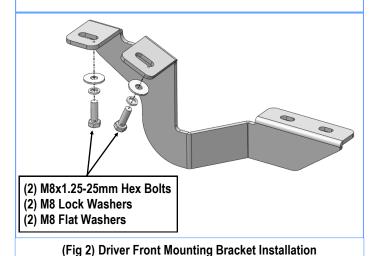


STEP 3

Move along the side panel to the Driver Side Center Mounting Location, (Fig 3). Repeat Step 2 to install the Driver Center Mounting Brackets, (Fig 4).



(Fig 3) Driver Side Center & Rear Mounting Location (Example Only)

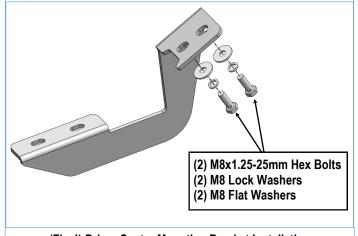

(Fig 4) Driver Center Mounting Bracket Installation

STEP 4

Move along the side panel to the Driver Side Rear Mounting Location. Repeat Step 3 to install the Driver Rear Mounting Brackets.

Customer Support: info@iboardauto.com

Board®



STEP 5

Once all (3) Driver side mounting brackets are installed, then proceed to the Step Bar installation. (Figs 5 & 6)

- (1) Select (1) Slider and (2) M8X1.25-35mm Carriage Bolts;
- (2) Install (2) M8X1.25-35mm Carriage Bolts in (1) Slider.
- (3) Slide the Slider (with carriage bolts) to the Step Bar.
- (4) Repeat to install the other (2) sliders to the step bar.
- (5) Attach the Step Bar (with the Sliders) onto the installed mounting brackets. Position the Sliders to the installed brackets. Secure the Step Bar to the installed Brackets by using (6) M8 Large Flat Washers and (6) M8 Nylon Lock Nuts and (3) Sliders, (Fig 6). Do not fully tighten hardware at this time.

Note: The Sliders are packed with the Mounting Brackets.


Level and adjust the Step Bar and fully tighten all hardware.

Repeat Steps 1-5 for the other side Step Bar installation. The installation is completed!!!

Attention

Do periodic inspections to the installation to make sure that all hardware is secure and tight.

In order to protect your bars/boards, please use mild soap/non-abrasive products for cleaning only.

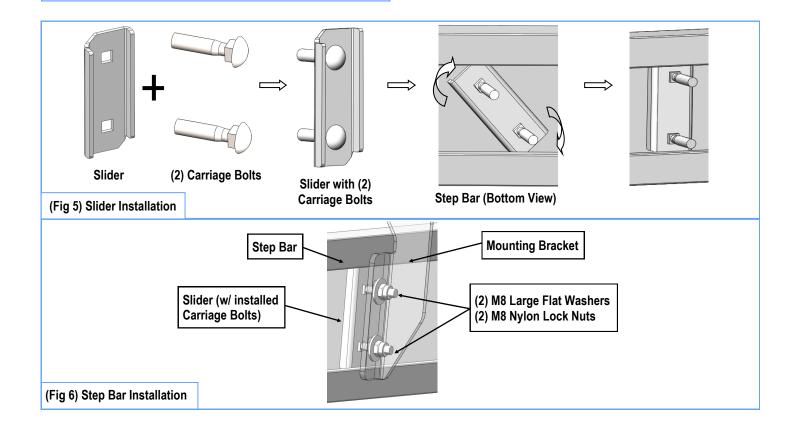

Customer Support: info@iboardauto.com