




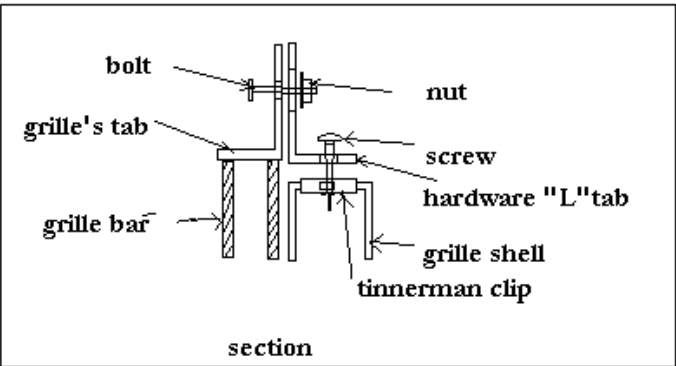
Grille Installation Instruction

Rev. 181001

| | | | |
|-------|--------------|-------------|-----------------------------|
| Part# | GR04HED44A/H | Application | For 2004-2006 Dodge Durango |
|-------|--------------|-------------|-----------------------------|

| Parts List | Item | Part Name | QTY | Description | Item | Part Name | QTY | Description |
|------------|------|---------------|-----|-------------|------|----------------|-----|-------------|
| | 1 | Billet Grille | 2 | Aluminum | 4 | Screws | 8 | 10#x3/4" |
| | 2 | Kepr Nuts | 8 | 8# | 5 | Tinnerman Clip | 8 | |
| | 3 | Screws | 8 | 8-32X3/4" | 6 | L Brackets | 8 | |

Install Notes: Overlay Replacement Drill Cut

| Step | Description | illustration |
|------|--|--|
| 1 | Identify the grille & hardware with parts list. |  |
| 2 | Remove the grille shell from the vehicle. Save and set aside all hardware you will need them to re-install the grille shell. | |
| 3 | Tape off the grille shell so you do not scratch or damage the grille shell during the install. | |
| 4 | Next you will need to snap out the black center section of the grille shell. | |
| 5 | Using a die grinder there will be four tabs that you will need to grind off. | |
| 6 | Place the two billet pieces into the grille shell from the back side. Center the grille; be sure that the billet grill sits flush to the grille shell. | |
| 7 | Attach the extension brackets to the billet grille. Note: The two lower outside L brackets will be secured facing down and the rest will secure facing upward. | |
| 8 | Place the billet grille back into the grille shell from the backside. Next mark and drill all your mounting points. |  |
| 9 | Make sure the billet grille is centered and tighten the fasteners. | |
| 10 | Reinstall the black plastic cover which was removed in step 2. | |
| 11 | Installation completed!!! | |

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!