



# PATENT PRODUCT

## Grille Installation Instruction

Rev. 180801

<b>Part#</b>	<b>GR04FEG30C/J</b>	<i>Application</i>	<b>For 1997-2004 Dodge Dakota /1997-2003 Dodge Durango</b>
--------------	---------------------	--------------------	--

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	4	Stainless steel	5	Safety Release Lever Extension	1	
	2	U-Clip Nuts	8	8#	6	Truss Head Tapping Screws	8	8#×2"
	3	Kep Nut	1	10" -32	7	Socket stud	1	10" -32×3/4"
	4	Flat Tabs	8					

**Install Notes:** Overlay  Replacement  Drill  Cut


Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Optional (for vehicles with black plastic cover under hood), Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell. If you are still unable to access the rear, remove the grille shell and reattach after installation.	
3	Place the supplied hood latch release lever up to the latch as shown.(Fig 1)	
4	Mark the location of the hole in the extension lever onto the latch.(Fig 2)	
5	Drill hole in latch and fasten the extension lever with the supplied nut & bolt.(Fig 3)	



Fig 1



Fig 2

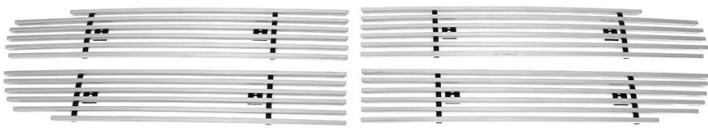

Fig 3

6	Slip the "U" nut onto the grille backing bracket as shown.(Fig 4)
7	Insert the supplied screw from the front side of the grille and thread through the "U" nut.(Fig 5)
8	Insert grille into grille opening then position backing bracket and fasten grille in place.(Fig 6)

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!

<b>Part#</b>	<b>GR04FEG30C/J</b>	<i>Application</i>	<b>For 1997-2004 Dodge Dakota /1997-2003 Dodge Durango</b>
--------------	---------------------	--------------------	--




Fig 4



Fig 5



Fig 6

9	Make sure the billet grille is centered and tighten the fasteners.
10	Reinstall the black plastic cover which was removed in step 2.
11	<div style="flex: 1;">Installation completed!!!</div> <div style="flex: 1;">  </div>

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!