



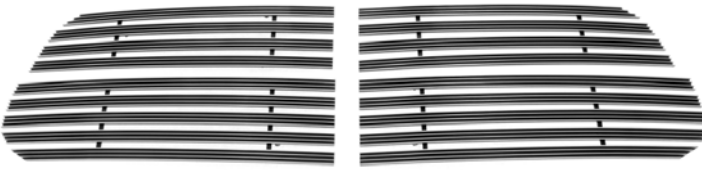
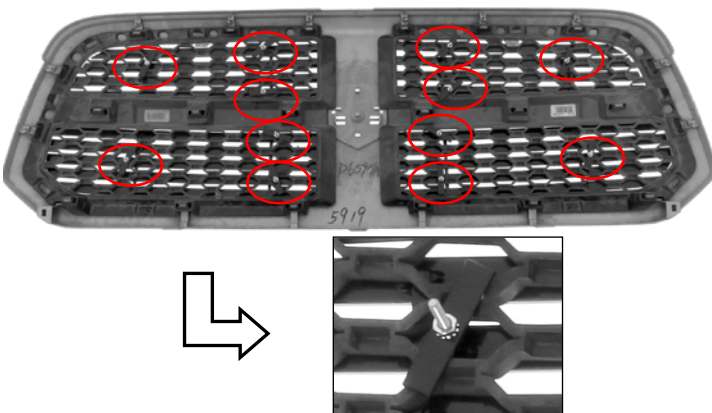
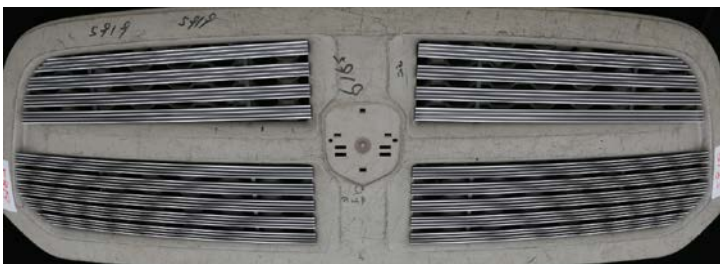
# Grille Installation Instruction

Rev. 190501

Part#	GR04FEI19T/U	Application	<b>For 2013-2018 Ram 1500 Honeycomb Style Only Main Upper</b>					
-------	--------------	-------------	---	--	--	--	--	--

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	4	Aluminum	3	Studs	12	10# -24 x 1.5"
2	Flat Tab	12		4	Hex Flange Nuts	12	10#	

Install Notes: Overlay  Replacement  Drill  Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Optional (for vehicles with black plastic cover under hood), Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell. If you are still unable to access the rear, remove the grille shell and reattach after installation.	
3	Secure the stud to the threaded holes on the rear of the grille. Hold the grille against the OEM grille shell, be sure the studs are through the OEM grille shell.	
4	Secure the grille using the flat tabs and hex flange nuts from the back side of the OEM grille shell.	
5	Make sure the billet grille is centered and tighten the fasteners, but do not over-tighten.	
6	Reinstall the black plastic cover which was removed in step 2.	
7	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the grille a little bit to adjust to fit. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!