
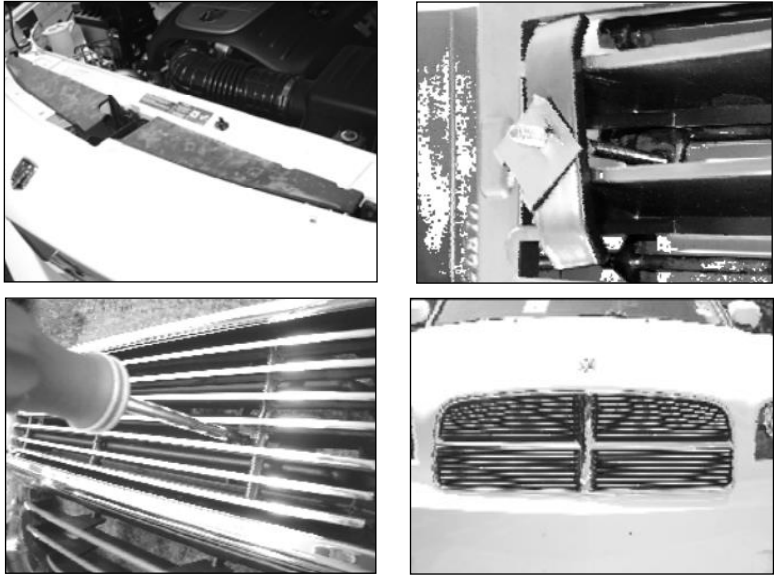


Part#	GR04FFD38A/H	Application	For 2005-2010 Dodge Charger Honeycomb Style
-------	--------------	-------------	---

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	4	Aluminum	3	Screws	8	6-32X2"
	2	U-clip Nuts	8	6-32	4	Flange Brackets	8	2"

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Open the hood. Remove the two-piece plastic radiator covers in front of the core support. Each cover has metal press-in clips securing them in place. Pull up on the covers to remove them. This will allow access to the rear of the grille.	
3	Test fit the billet into grille. Insert a screw into the mounting tabs on the billets; slide the U-nuts onto the flange brackets. Start to thread the flange brackets onto the screws. Center one of the lower billets on the grille. Pull the flange brackets through the plastic bars on the factory grille. Use a screwdriver to tighten the hardware.	
		
4	Make sure the billet grille is centered and tighten the fasteners.	
5	Reinstall the black plastic cover which was removed in step 2.	
6	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!