



# PATENT PRODUCT


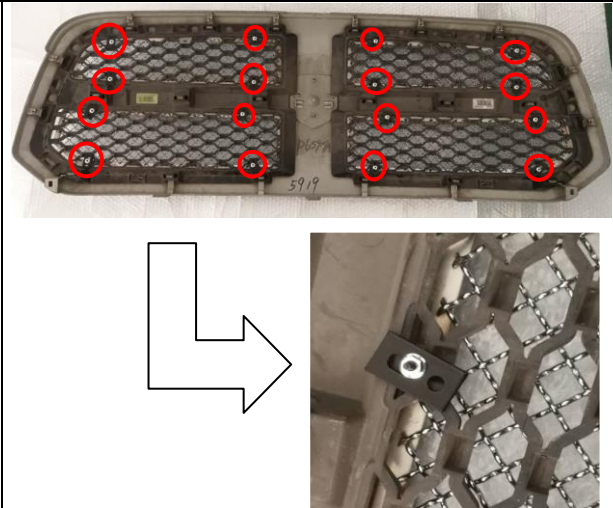

## Grille Installation Instruction

Rev. 20200201

<b>Part#</b>	<b>GR04GEI19K</b>	<i>Application</i>	<b>For 2013-2018 Ram 1500 Honeycomb Style Only Main Upper</b>
--------------	-------------------	--------------------	---

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Mesh Grille	4	Stainless Steel	3	Hex Flange Nuts	16	6-32
	2	Studs	16	6-32x1"	4	2-Hole Tabs	16	2-Hole

**Install Notes:** Overlay  Replacement  Drill  Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Optional: pop hood, remove the black plastic cover (on top of OEM grille) from vehicle. If you are still unable to access the rear, remove the grille shell according to factory manual.	
3	Thread a stud in each nut welded to the grille. From the rear, place a tab on each stud. Now thread a nut on each stud.	
4	Make sure the insert is centered and tighten the hardware.	
5	Reinstall the plastic shroud with the fasteners removed in Step 2.	
6	Installation completed.	

The instruction here is for your reference only. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!