Grille Installation Instruction

APS Auto Parts Specialist Inc.

Rev. 181001

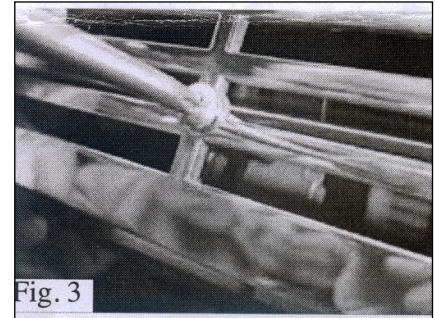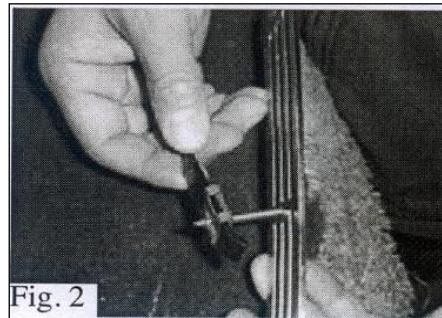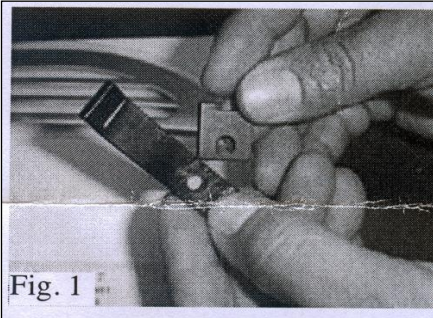| Part#	GR06FFH81A/H	Application	For 2011-2013 Ford Fiesta SE / SEL Hatch Back/ 2013 Ford Fiesta Titanium Hatch Back

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	2	Aluminum	3	Screws	2	8#X2"
	2	U-Nuts	2	8#	4	Flange Offset	2	2"

Install Notes: Overlay √ Replacement × Drill × Cut ×

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Optional (for vehicles with black plastic cover under hood), Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell. If you are still unable to access the rear, remove the grille shell and reattach after installation.	
3	Place the #8 U-Nut through the 2″ flange offset as shown in Fig. 1	
4	Take the screw and push it into billet grille weld tab hole, through honey comb then secure the grille using the Clip Nuts from the back side of the OEM grille shell.	
5	Place the 2″ Screws through the hole on the billet grille and have the 2″ flange hooks facing towards the grille shown in Fig.2	
6	Once the 2″ flanges hook on the factory grille. With another screwdriver or anything that will go through, tweak the flanges and hold them in place then start to tighten the 2″ screw shown in Fig.3	

Fig. 1   Fig. 2   Fig. 3

Step	Description
7	Make sure the grille is centered and tighten the fasteners.
8	Reinstall the black plastic cover which was removed in step 2.
9	Installation completed!!!