

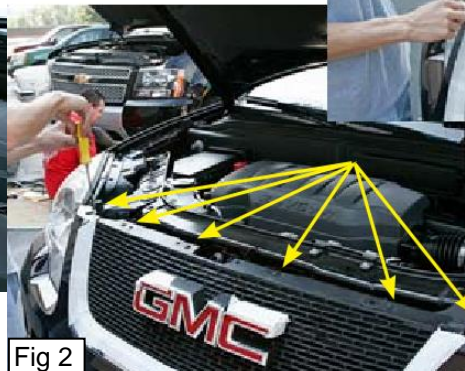




Part#	<b>GR07FFE15A/H</b>	Application	<b>For 2007-2012 GMC Acadia</b>
-------	---------------------	-------------	---------------------------------

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	4	Aluminum	3	Truss Head Tapping Screws	4	8x1 "
	2	Flat Nuts	4	8#				

Install Notes: Overlay  Replacement  Drill  Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Pop hood, start by removing the plastic core support cover. Do so by removing the plastic push pull style rivets as shown(Fig 1). Using a small regular screwdriver lift on the center portion of the rivet to release. Remove the core support cover.	
3	With core support cover removed, remove the (6) phillips head screws holding top portion of the stock grille shell in place(Fig 2). Also remove (2) more of the plastic push pull style rivets located just outside of the chrome on stock shell on driver and passenger side of shell (Fig B). This allow you to reach behind the stock grille shell.	
4	Place billet grille into opening and center. Attach billet grille by using the supplied 8# x 1" screws and nuts. (Fig 3)	
		   
5	Reinstall the black plastic cover which was removed in step 2.	
6	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!