

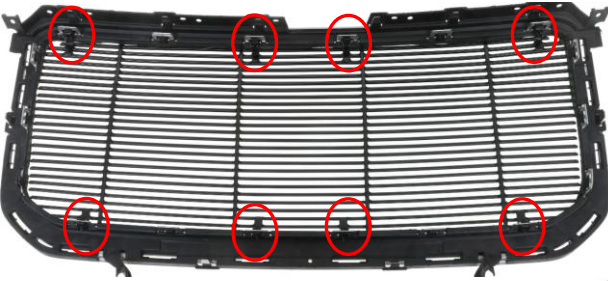



Part#	GR07HEI74A/H	Application	For 2013-2016 GMC Acadia
-------	--------------	-------------	--------------------------

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	1	Aluminum	3	Screws	8	8#-3/4"
	2	Flat Nuts	8	8#				

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	You may need to remove the black plastic cover (at the bottom of OEM front bumper) from vehicle. This will allow access to the rear of the OEM grille shell.	
3	To take the black plastic back section of the factory grille, you will need to cut out the center section. On the backside of the plastic use a cutting wheel and grinder to cut along the ridge around the opening highlighted white. Smooth the cut edge with the grinding wheel.	
4	Center the grille into the opening of the factory grille shell. Be sure the hooks are through the OEM grille shell. You need mark and drill 8 holes.	
5	Re-center the grille into the opening of the factory grille shell. Secure grille using the screws and flat nuts from the back side of the OEM grille shell.	 <div data-bbox="1299 1155 1461 1249" style="border: 1px solid black; padding: 2px; display: inline-block;">Mark and drill 8 holes</div> <div data-bbox="1052 1438 1221 1512" style="border: 1px solid black; padding: 2px; display: inline-block;">(8) Screws (8) Flat Nuts</div>
6	Make sure the grille is centered and tighten the fasteners. Reinstall the black plastic cover which was removed in step 2.	
7	Installation completed.	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!