
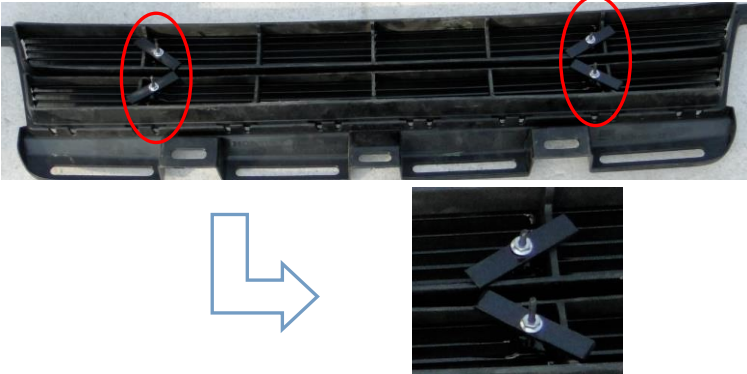



| | | | |
|-------|--------------|-------------|--|
| Part# | GR08FFF90A/H | Application | For 2009-2011 Honda Element Not For SC Model |
|-------|--------------|-------------|--|

| Parts List | Item | Part Name | QTY | Description | Item | Part Name | QTY | Description |
|------------|------|---------------|-----|-------------|------|-------------------|-----|-------------|
| | 1 | Billet Grille | 2 | Aluminum | 3 | Truss Head Screws | 4 | 6-32x1.5" |
| | 2 | Flat Tabs | 4 | / | 4 | K- Lock Nuts | 4 | 6-32 |

Install Notes: Overlay Replacement Drill Cut

| Step | Description | illustration |
|------|---|--|
| 1 | Identify the grille & hardware with parts list. |  |
| 2 | Optional (for vehicles with black plastic cover under hood), Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell. If you are still unable to access the rear, remove the grille shell and reattach after installation. | |
| 3 | Center the billet grille into the opening of the factory grille shell. | |
| 4 | Place the screws through the holes of the tabs welded to the rear of the billet grille, then secure it using the tabs and k- lock nuts from the back. |  |
| 5 | Make sure the billet grille is centered and tighten the fasteners. | |
| 6 | Reinstall the black plastic cover which was removed in step 2. | |
| 7 | Installation completed!!! |  |

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!