



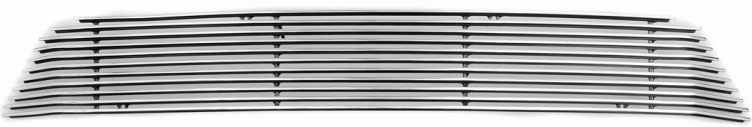
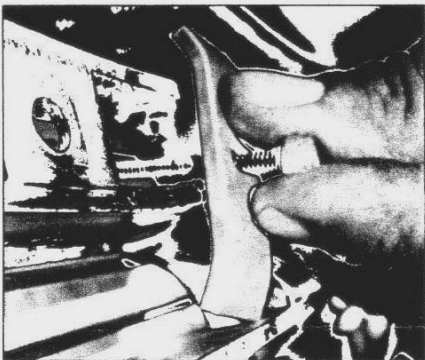
Grille Installation Instruction

Rev. 180901

Part#	GR08FGA25A/H	Application	For 2006-2008 Honda Civic Coupe Not For SI Model					
-------	--------------	-------------	--	--	--	--	--	--

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	1	Aluminum	3	Nylon Lock Nuts	4	6-32
2	Screws	4	6-32x2"	4	Flange Brackets	4	2"	

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Remove the fasteners holding the radiator cover in place; remove the cover. Remove the bolts securing the bumper cover to the core support (located near the radiator mounts). Pull the bumper cover forward; remove the nine small Phillips screws securing the grille. Now unfasten the molded clips and separate the grille.	
3	Test fit the billet insert over the bumper opening. Install the screws into the tabs on the billet. From the back of the bumper, install a flange bracket and lock nut onto each screw (picture). Tighten the hardware until the billet is held in place.	
4	Make sure the grille is centered and tighten the fasteners.	
5	Re-install the grille and radiator cover.	
6	Installation completed!!!	

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!