


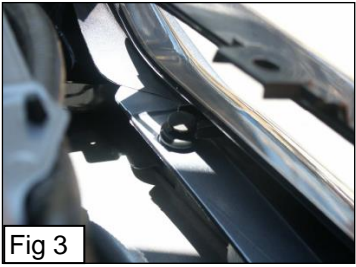




Part#	GR08HGA33A/H		Application	For 2006-2007 Honda Accord Coupe Coupe				
Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	1	Aluminum	4	Screws	2	8#
	2	K-Lock Nuts	4		5	Fully Threaded Studs	4	2 "
	3	Speed Clips	2		6	Powder Coated Hook Brackets	4	
Install Notes: Overlay <input type="checkbox"/> Replacement <input checked="" type="checkbox"/> Drill <input checked="" type="checkbox"/> Cut <input type="checkbox"/>								
Step	Description			illustration				
1	Identify the grille & hardware with parts list.							
2	Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell.							
3	Using a flat blade screwdriver remove all of the plastic clips from the top of the factory grille shell and the plastic filler panel. Figure 1 & 2.							
4	The plastic clips located at the bottom of the factory grille shell also need to be removed using a flat blade screwdriver. Figure 3							
5	Install the fully threaded studs into the threaded tabs near the bottom of the billet grille.							
6	Center the billet grille into the factory opening.							
7	Place the powder coated hook brackets over the fully threaded studs and over the lip of the factory grille shell opening and hold in place using the k-lock nuts. Figure 4							
								
8	Make sure the billet grille is centered to your liking and secure lower portion of the billet with the k-lock nuts.							
9	Once the lower porting of the billet grille is secure and the billet grille is centered mark and drill the upper mounting holes.							
10	Secure the upper portion of the billet grille to the vehicle using the #8 screws and speed clips. Figure 5							
11	Reinstall the plastic filler panel using the factory hardware from step 2~3.							
12	Installation completed!!!							

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!