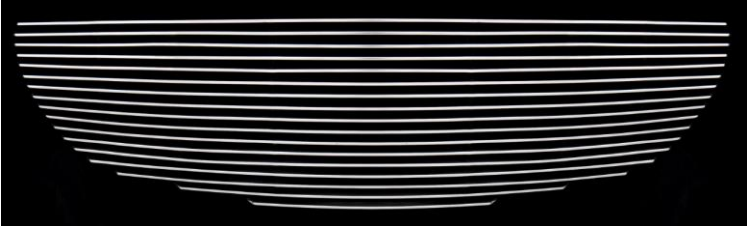


Part#	GR13FFF48J	Application	For 2009-2012 Mazda MX-5 Miata Honeycomb Style Only Drilling Required
-------	------------	-------------	--

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Billet Grille	1	Stainless steel	3	Screws	4	6-32×1"
	2	Toggle Nuts	4	6#				

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Pop hood, remove the black plastic cover (on top of OEM grille / front panel) from vehicle. This will allow access to the rear of the grille shell.	N/A
3	Center the billet grille into the opening of the factory grille shell. Secure the bolt to the threaded holes on the front of the grille. Mark the mounting position and drill two holes. Be sure the bolts are through the OEM grille shell.	N/A
4	Thread a screw in each nut welded to the grille. From the rear, place a tab on each screw. Now thread a nut and a washer on each screw.	N/A
5	Make sure the billet grille is centered and tighten the fasteners.but do not over-tighten.	N/A
6	Reinstall the black plastic cover which was removed in step 2.	N/A
7	Installation completed!!!	N/A

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result.
 Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation.
 We are not responsible for any damage caused by the installation. Thank you for choosing our product!