



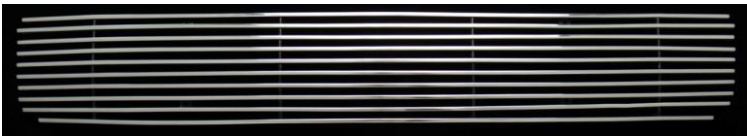
Grille Installation Instruction

Rev. 181101

| | | | |
|-------|--------------|-------------|--|
| Part# | GR20FEA43A/H | Application | For 1992-1995 Toyota Pickup Truck 4WD |
|-------|--------------|-------------|--|

| Parts List | Item | Part Name | QTY | Description | Item | Part Name | QTY | Description |
|------------|------|---------------|-----|-------------|------|-------------------|-----|-------------|
| | 1 | Billet Grille | 1 | Aluminum | 3 | Truss Head Screws | 4 | 6-32×1.5" |
| | 2 | Toggle Nuts | 4 | 6# | | | | |

Install Notes: Overlay Replacement Drill Cut

| Step | Description | illustration |
|------|---|--|
| 1 | Identify the grille & hardware with parts list. |  |
| 2 | Place screws through the welded aluminum tabs on the grille, and attach a toggle nut on the end of each bolt. | |
| 3 | Hold the billet insert up to the opening of the factory shell, make sure that it is centered in the grille shell, and push in the toggle nut past the factory grille honeycomb. | |
| 4 | Turn the toggle nut so that it is vertical, and tighten. But not over-tighten! | |
| 5 | Installation completed!!! | |

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result. Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation. We are not responsible for any damage caused by the installation. Thank you for choosing our product!