
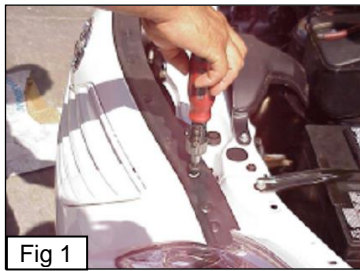


Part#	GR20GEB15T/H	Application	For 2007-2009 Toyota Camry Not For SE
-------	--------------	-------------	---------------------------------------

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	1	Mesh Grille	1	Stainless steel	4	Flange Nuts	6	0.138-32
	2	L Brackets	6		5	Washers	6	
	3	Studs	6	0.138-32 × 1 1/2"				

Install Notes: Overlay Replacement Drill Cut

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Remove the 2 screws that hold the top portion of the front fascia to the core support. (Fig 1).	
3	Remove the 2 push clips that hold the top portion of the front fascia to the core support. (Fig 2).	
4	Remove the bolt that holds the center of the front fascia to the core support. (Fig 3).	
5	Rock the top portion of the front fascia forward to gain access to the backside of the factory grille shell.	
6	There are 16 clips that hold the factory grille shell and most should come undone by pulling out on the grille shell, some of them may need to be unclipped from the backside and then remove the factory grille shell from the front fascia. (Fig 4).	



7	Center the grille into the opening of the factory grille shell. Secure the stud to the threaded holes on the front of the grille. Be sure the studs are through the OEM grille shell.
8	Secure grille using the L Brackets , Washers and Flange Nuts from the back side of the OEM grille shell.
9	Make sure the grille is centered and tighten the fasteners. But do not over-tighten.
10	Reinstall the black plastic cover which was removed in step 6.
11	Installation completed!!!

The instruction here is for your reference only. You may need to bend the billet grille bars or tabs a little bit to adjust to fit. We strongly recommend the professional installer for best result.
 Please use masking tape and tape the OEM grille shell along the edge to protect your vehicle during installation.
 We are not responsible for any damage caused by the installation. Thank you for choosing our product!