

PATENT PRODUCT


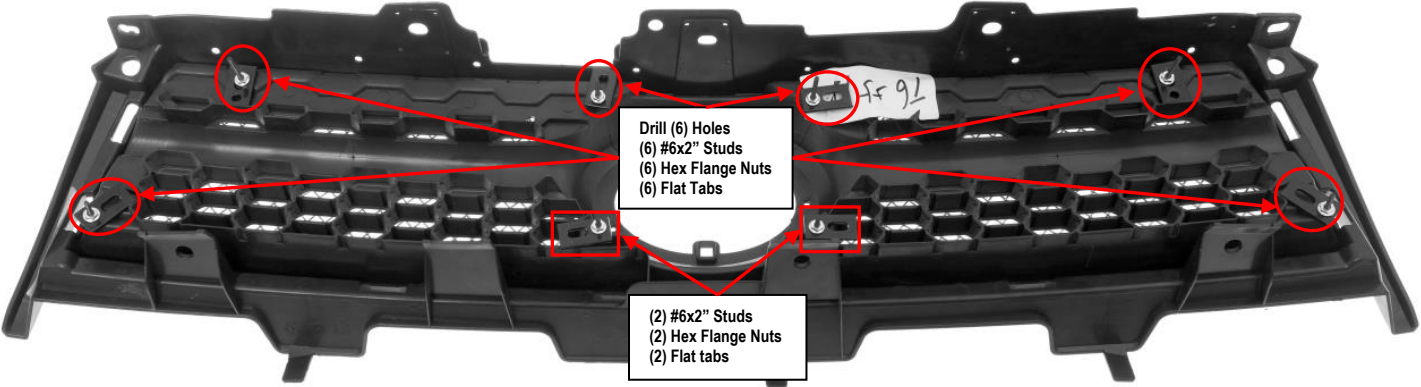

Grille Installation Instruction

Rev. 20231101

Part#	T75578T&H	Application	For 2009-2012 Toyota RAV4 Not for Limited
--------------	-----------	--------------------	---

Parts List	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
	#1	Mesh Grille	2	Stainless Steel	#3	Hex Flange Nuts	8	#6
	#2	Studs	8	#6x2"-32	#4	Flat Tabs	8	

Install Notes: Overlay ☒ Replacement ☐ Drill ☒ Cut ☐

Step	Description	illustration
1	Identify the grille & hardware with parts list.	
2	Optional: pop hood, remove the black plastic cover (on top of OEM grille) from vehicle. If you are still unable to access the rear, remove the grille shell according to factory manual.	
3	Hold the mesh grille against the OEM grille shell, center and mark (6) holes for drilling. Remove the grille and drill holes according to your marks.	
4	Thread a Stud in each nut welded to the grille. From the rear, place a Flat Tab on each Stud. Now thread a Hex Flange Nut on each Stud.	
	 <p>Drill (6) Holes (6) #6x2" Studs (6) Hex Flange Nuts (6) Flat Tabs</p> <p>(2) #6x2" Studs (2) Hex Flange Nuts (2) Flat tabs</p>	
5	Make sure the insert is centered and tighten the hardware.	
6	Reinstall the plastic shroud with the fasteners removed in Step 2.	
7	Installation completed.	

The instruction here is for your reference only. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!