

## **Hitch Installation Instruction**


REV.20241201

Part# HT-R30419 Application For 2019-2024 Ram 1500 With factory class 3 towing bumper

	Item	Part Name	QTY	Description	Item	Part Name	QTY	Description
Hardware List	1	Double-Nut Plate	1		3	Hex Bolts	2	M12X1.75-40
	2	Inner Hex Bolt	1	M20X2.5-80	4	Conical Washers	2	M12

Gross Load Capacity When Used As A Weight Carrying Hitch: 6000 LBS. Trailer Weight & 600 LBS. Tongue Weight.

\*\*\*DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY. \*\*\*

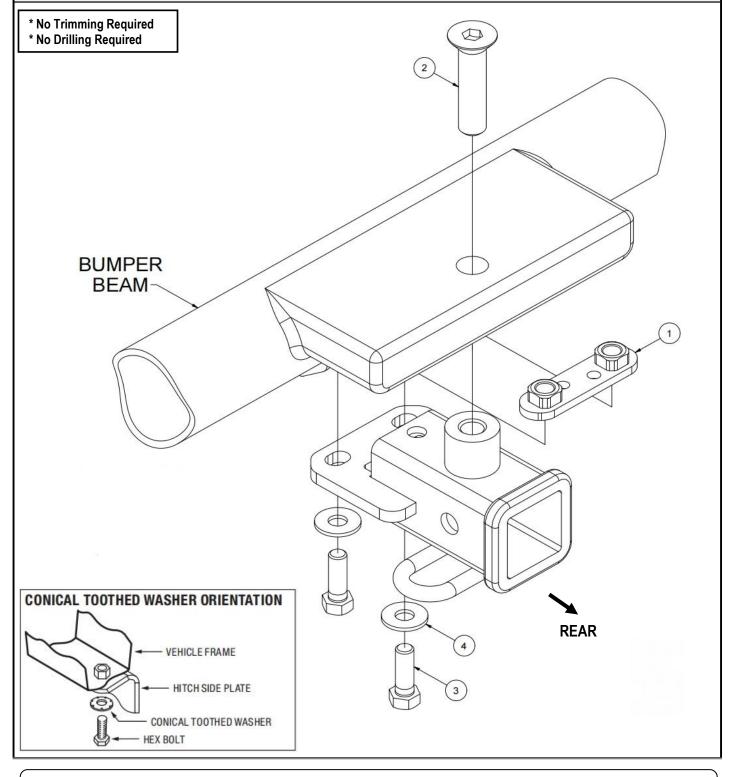

The instruction here is for your reference only. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!



## **Hitch Installation Instruction**

Part# HT-R30419 Application For 2019-2024 Ram 1500 With factory class 3 towing bumper

Step	Description				
1	Remove plug from center of bumper step and insert M20 Inner Hex bolt. Save plug for reinstallation in Step 4.				
2	Place Double-Nut Plate on top of vehicle safety chain loop with weld nuts on top.				





- Raise hitch into position and loosely secure with M20 Inner Hex bolt followed by M12 bolt and conical washer.
- 4 Torque M20 hardware to 250 lb-ft and M12 hardware to 86 lb-ft. Reinstall plug removed in Step 1.





5 Installation Complete.

\*\*\*Periodically Check The Receiver Hitch To Ensure That All Fasteners \*\*\*
Are Tight & All Structural Components Are Sound.

The instruction here is for your reference only. We strongly recommend the professional installer for best result. We are not responsible for any damage caused by the installation. Thank you for choosing our product!